


Unit: mm
Tolerance: ±0.5mm



Operating Voltage (Vp-p maximum)	20
Sound Pressure Level at 10cm/10Vp-p square wave(dB, minimum)	80 at 4.0KHz
Current Consumption at 4.0KHz/10Vp-p square wave (mA, maximum)	7
Capacitance at 120Hz/1V (±30%pF)	14,000
Operating Temperature (°C)	-20~+85
Storage Temperature (°C)	-30~+90
Weight (Gram)	0.85

TITLE		SOUND TRANSDUCER		PART NO.		1162	
APPROVALS		SCALE: 2:1		MATERIAL PPO (UL94V-1)			
DRAWN FENG 98' 6/30		UNIT: mm					
CHECKED		EDITION: 2					
APPROVED		SHEET 1 OF 1					

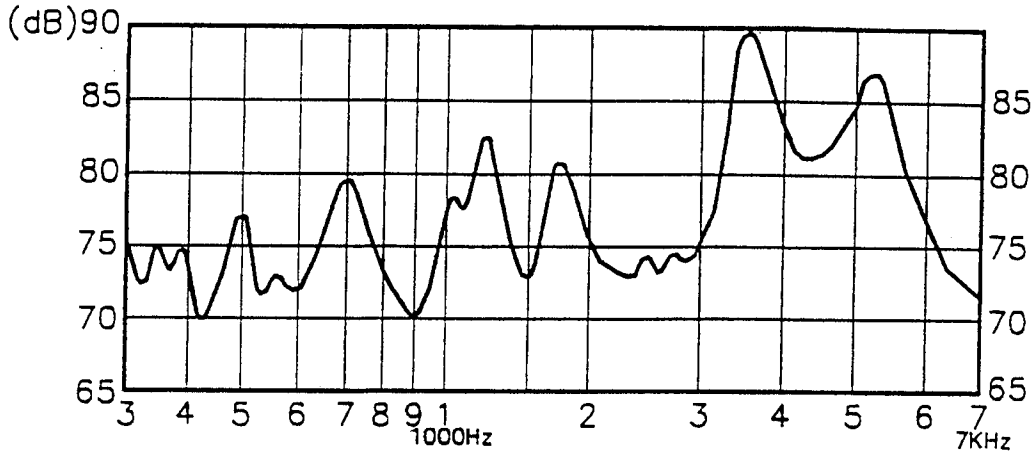

6851 Jericho Turnpike
Syosset, New York 11791
Tel#516-921-9111
Fax#516-921-3777