
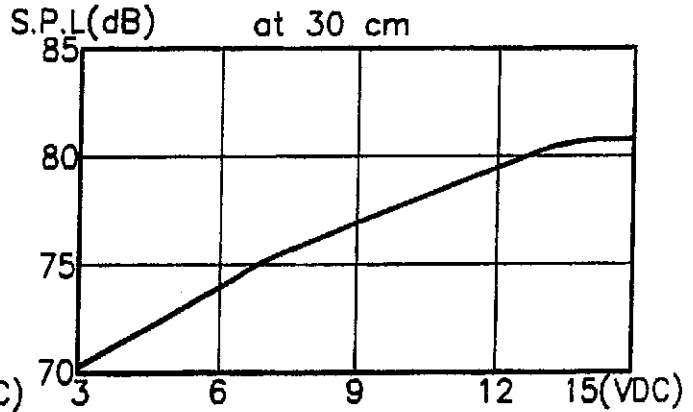


Unit: mm
Tolerance: ± 0.5 mm

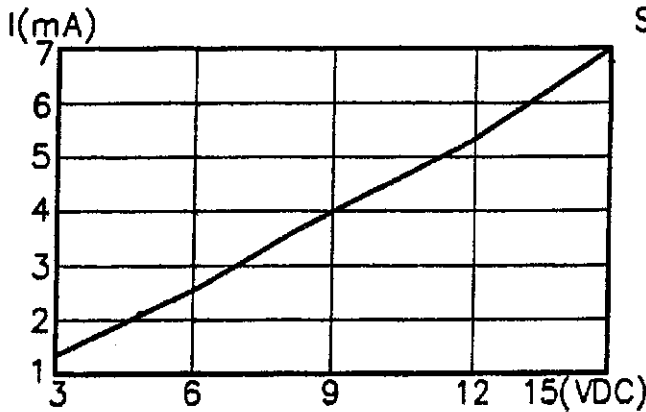

Oscillating Frequency (KHz)	4.1 \pm 500Hz
Operating Voltage (VDC)	3-16
Current Consumption at 12 VDC (mA,maximum)	8
Sound Pressure Level at 12VDC/30cm(dB,minimum)	70
Tone	Continuous
Operating Temperature ($^{\circ}$ C)	-20~+70
Weight (Gram)	1.0

TITLE PIEZO AUDIO INDICATOR		PART NO. 2240 (RoHS)
APPROVALS	SCALE: 2:1	
DRAWN FENG June. 20.2008	UNIT: mm	
CHECKED	EDITION: 1	MATERIAL ABS UL-94 1/16" HB
APPROVED [Signature]	SHEET 1 OF 1	

SHOGYO

SHOGYO INTERNATIONAL CORP.
6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
TEL: (516) 921-9111 • FAX: (516) 921-3777
www.shogyo.com