
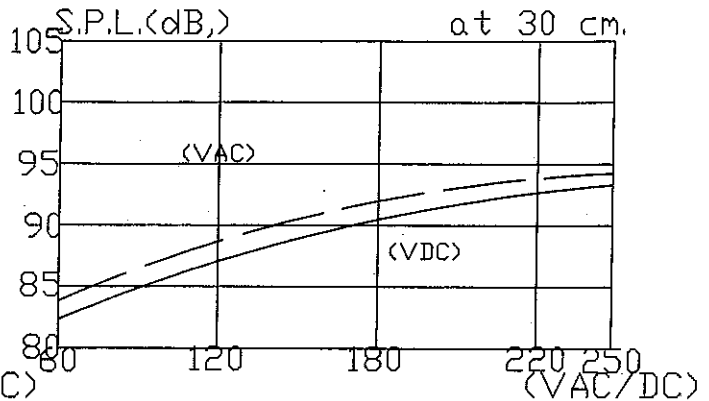


Unit:mm.
Tolerance:
±0.5mm.

***Panel mounting (fits 1 1/8" dia. panel openings up to 1/4" thick)

(NON-UL)

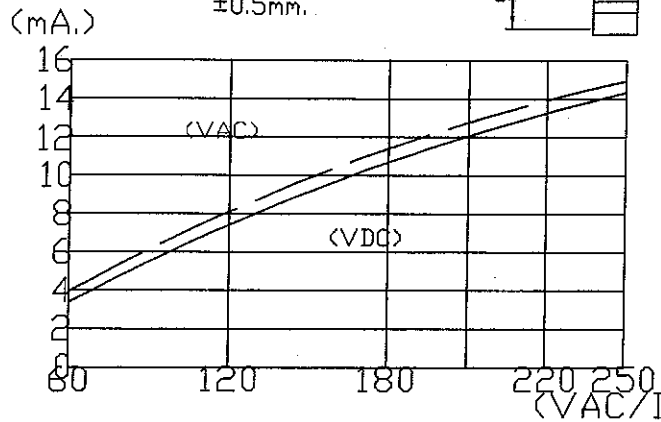

Oscillating Frequency(Hz)	2900±500Hz.
Operating Voltage(VDC/VAC)	60 - 250
Tone	Slow Pulse(1.2Hz.)
Operating Temperature(°)	-20~+60
Storage Temperature(°)	-30~+70
Weight (Gram)	48

PIEZO AUDIO INDICATOR		PART NO.
DRAWN	2012/6/1	2923AN(RoHS)
UNIT:	mm.	
EDITION:	1	MATERIAL
SHEET	1 OF 1	ABS UL-94 1/16" HB



SHOGYO INTERNATIONAL CORP.
6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
TEL: (516) 921-9111 • FAX: (516) 921-3777
www.shogyo.com