
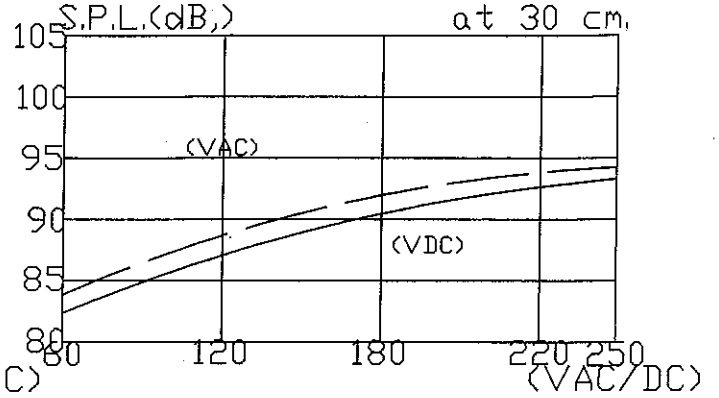


\*\*\*Panel mounting (fits 1/8" dia. panel openings up to 1/4" thick)

(NON-UL)

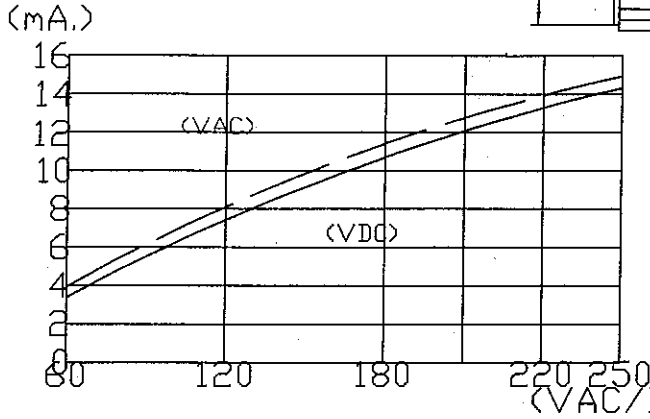

Oscillating Frequency(Hz)	2900±500Hz.
Operating Voltage(VDC/VAC)	60 - 250
Tone	Slow Pulse(1.2Hz.)
Operating Temperature(°)	-20~+60
Storage Temperature(°)	-30~+70
Weight (Gram)	48

PIEZO AUDIO INDICATOR		PART NO.
DRAWN 2012/08/08		2923SAN(RoHS)
UNIT: mm.		
EDITION: 1		MATERIAL
SHEET 1 OF 1		ABS UL-94 1/16" HB



**SHOGYO INTERNATIONAL CORP.**  
 6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791  
 TEL: (516) 921-9111 • FAX: (516) 921-3777  
 www.shogyo.com