
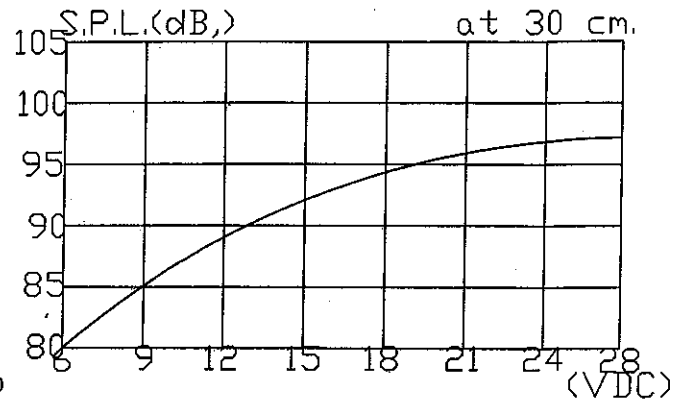


Unit:mm.
Tolerance:
 $\pm 0.5\text{mm}$.

***Panel mounting (fits $1\frac{1}{8}$ " dia. panel openings up to $\frac{1}{4}$ " thick)

(NON-UL)

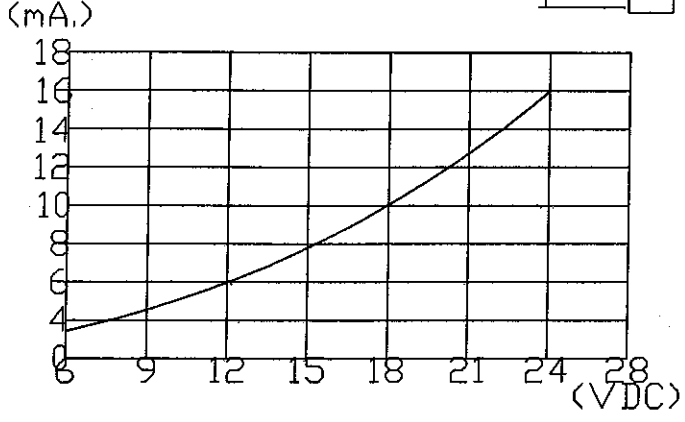

Oscillating Frequency(Hz)	2900 \pm 500Hz.
Operating Voltage(VDC)	6~28
Current Consumption at 12VDC (mA.maximum)	8
Sound Pressure Level at 30cm/12VDC(dB.minimum)	85
Tone	Slow Pulse(3Hz.)
Operating Temperature($^{\circ}$)	-20~+60
Storage Temperature($^{\circ}$)	-30~+70
Weight (Gram)	35

PIEZO AUDIO INDICATOR		PART NO.
DRAWN	2012/6/1	2953S(ROHS)
UNIT:	mm.	
EDITION:	1	MATERIAL
SHEET	1 OF 1	ABS UL-94 1/16" HB



SHOGYO INTERNATIONAL CORP.
 6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
 TEL: (516) 921-9111 • FAX: (516) 921-3777
 www.shogyo.com