
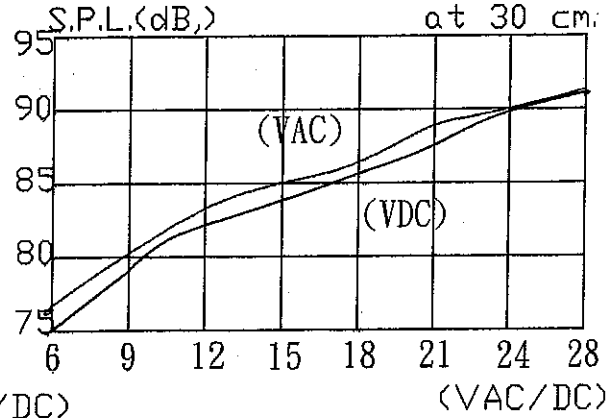


Unit:mm.  
Tolerance:  
 $\pm 0.5\text{mm.}$  (Non-UL)

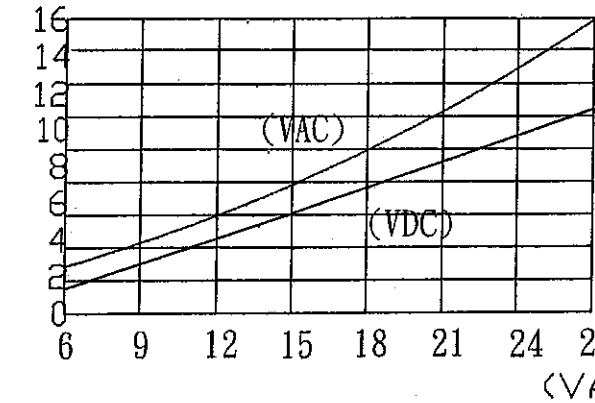

Oscillating Frequency(Hz)	2900 $\pm$ 500Hz.
Operating Voltage(VDC/VAC)	6 - 28V.
Tone	Slow Pulse(1.2Hz.)
Operating Temperature( $^{\circ}$ )	-20 $\sim$ +60
Storage Temperature( $^{\circ}$ )	-30 $\sim$ +70
Weight (Gram)	33.8

PIEZO AUDIO INDICATOR		PART NO.
DRAWN 2012/03/01		2953SAN(RoHS)
UNIT: mm.		MATERIAL
EDITION: 1		ABS UL-94 1/16" HB
SHEET 1 OF 1		

**SHOGYO**

**SHOGYO INTERNATIONAL CORP.**  
6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791  
TEL: (516) 921-9111 • FAX: (516) 921-3777  
www.shogyo.com