
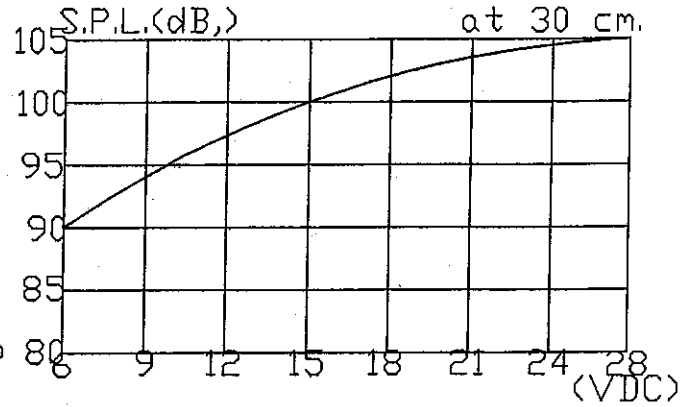


Unit:mm.  
Tolerance:  
±0.5mm.

\*\*\*Panel mounting (fits 1/8" dia. panel openings up to 1/4" thick)

(NON-UL)

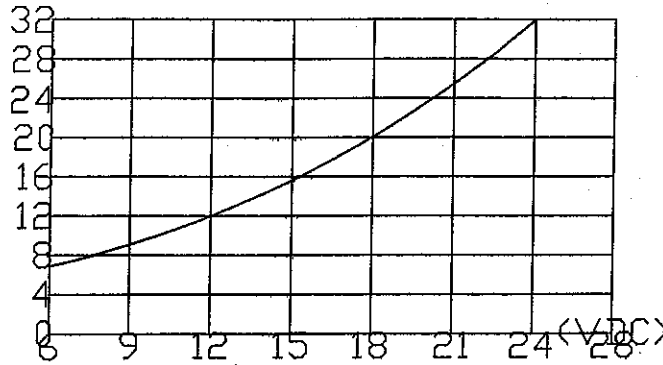

Oscillating Frequency(Hz)	2900±500Hz.
Operating Voltage(VDC)	6~28
Current Consumption at 12VDC (mA.maximum)	12
Sound Pressure Level at 30cm/12VDC(dB.minimum)	95
Tone (FAST PULSE:3Hz.±20%)	CONT.+FAST PULSE
Operating Temperature(°)	-20~+60
Storage Temperature(°)	-30~+70
Weight (Gram)	36

PIEZO AUDIO INDICATOR		PART NO.
DRAWN 2012/6/1		2955SA(ROSH)
UNIT: mm.		
EDITION: 1		MATERIAL
SHEET 1 OF 1		ABS UL-94 1/16" HB



**SHOGYO INTERNATIONAL CORP.**  
6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791  
TEL: (516) 921-9111 • FAX: (516) 921-3777  
www.shogyo.com