
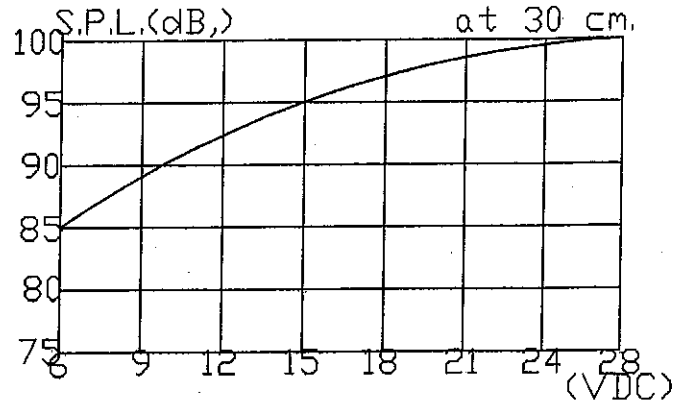


Unit:mm.
Tolerance:
±0.5mm.

***Panel mounting(fits 1/8" dia. panel openings up to 1/4" thick)

(NON-UL)

(mA,) VOLUME CONTROL RANGE: 1 - 10 dB.

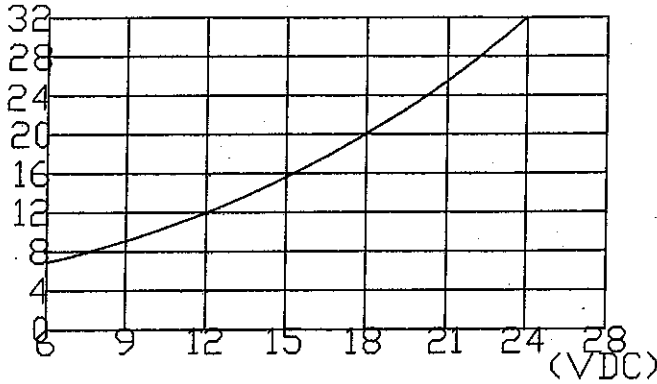

Oscillating Frequency(Hz)	2900±500Hz.
Operating Voltage(VDC)	6~28
Current Consumption at 12VDC (mA,maximum)	12
Sound Pressure Level at 30cm/12VDC(dB,minimum)	92
Tone	Cont.+ Slow Pulse(1.2Hz.)
Operating Temperature(°)	-20~+60
Storage Temperature(°)	-30~+70
Weight (Gram)	36

PIEZO AUDIO INDICATOR		PART NO.
DRAWN 2012/6/1		2957AL(RoHS)
UNIT: mm.		MATERIAL
EDITION: 1		ABS UL-94 1/16" HB
SHEET 1 OF 1		



SHOGYO INTERNATIONAL CORP.
6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
TEL: (516) 921-9111 • FAX: (516) 921-3777
www.shogyo.com