

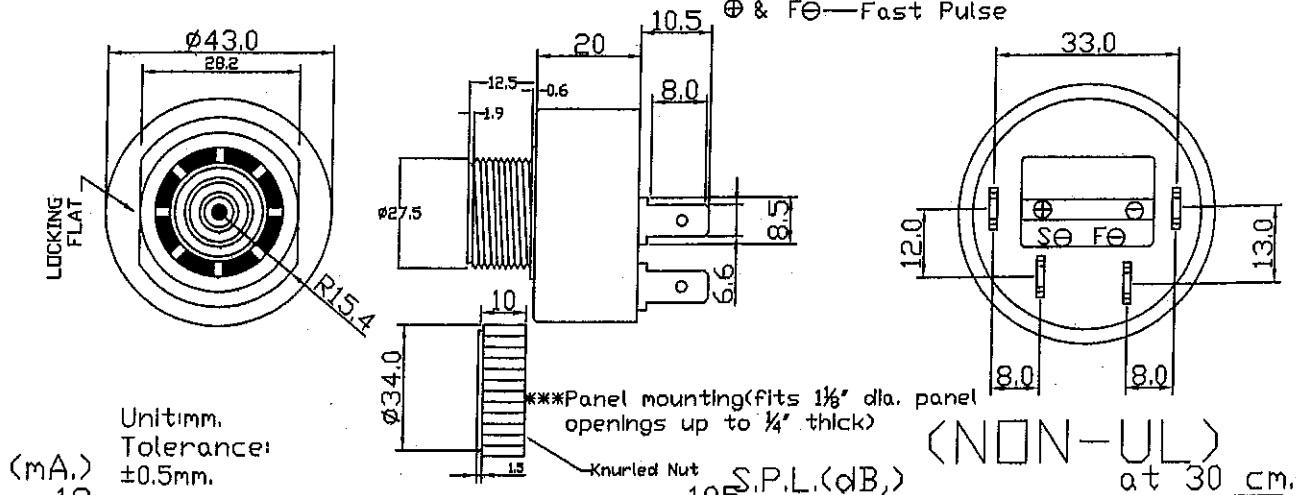


Power Connection(for Tone)
 ⊕ & ⊖ — Continuous
 ⊕ & ⊖ — Slow Pulse
 ⊕ & ⊖ — Fast Pulse

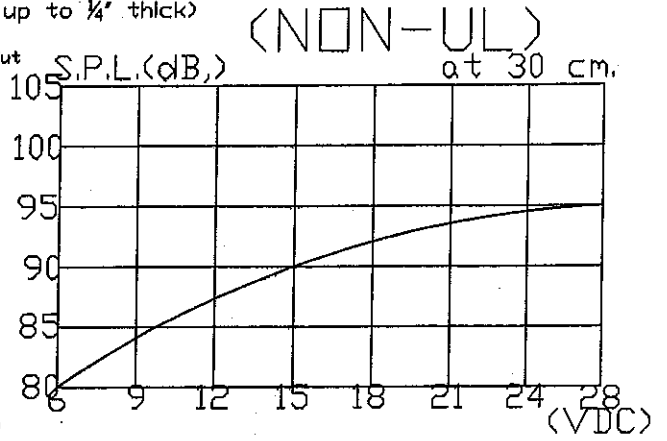

Unit:mm.
 Tolerance:
 $\pm 0.5\text{mm.}$

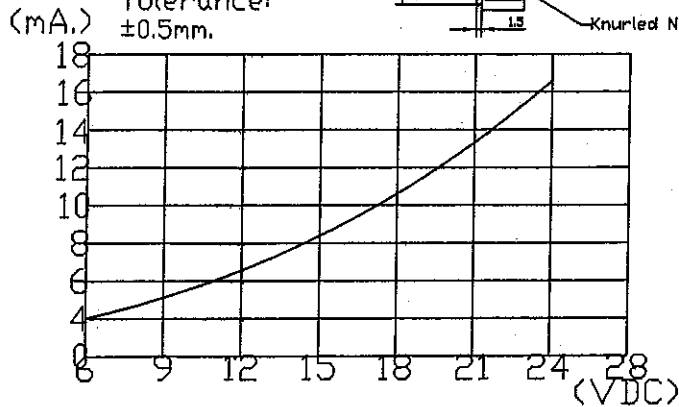

Oscillating Frequency(Hz)	2900 \pm 500Hz.
Operating Voltage(VDC)	6~28
Current Consumption at 12VDC (mA.maximum)	8
Sound Pressure Level at 30cm/12VDC(dB.minimum)	85
Tone (FAST PULSE:3Hz, SLOW PULSE:1.2Hz, \pm 20%)	CONT.+FAST PULSE +SLOW PULSE
Operating Temperature($^{\circ}$)	-20~+60
Storage Temperature($^{\circ}$)	-30~+70
Weight (Gram)	40

PIEZO AUDIO INDICATOR		PART NO.
DRAWN 2012/03/01		2959(RoHS)
UNIT: mm.		
EDITION: 1		MATERIAL
SHEET 1 OF 1		ABS UL-94 1/16" HB

SHOGYO

SHOGYO INTERNATIONAL CORP.
 6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
 TEL: (516) 921-9111 • FAX: (516) 921-3777
 www.shogyo.com