
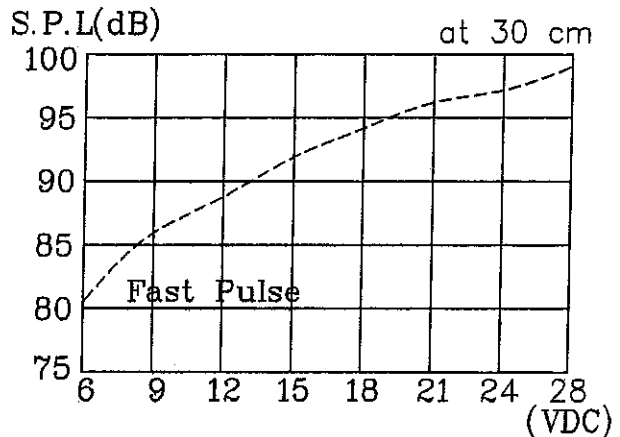


Unit: mm Tolerance: ± 0.5 mm

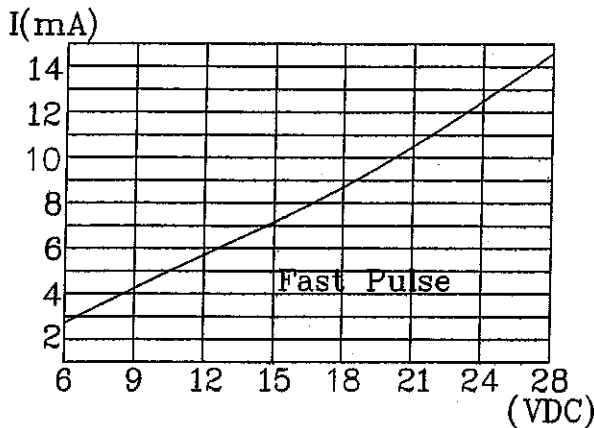

Oscillating Frequency (KHz)	3.6 \pm 0.5
Operating Voltage (VDC)	6~28
Current Consumption at 12 VDC (mA)	8
Sound Pressure Level at 12VDC/30cm (dB)	92
Tone	At 12VDC 3 \pm 20%Hz Fast Pulse
Operating Temperature ($^{\circ}$ C)	-20~+60
Storage Temperature ($^{\circ}$ C)	-30~+70
Weight (Gram)	21.0

TITLE PIEZO AUDIO INDICATOR		PART NO. 3651(RoHS)
APPROVALS	SCALE: 1:1	DWG NO.
DRAWN	UNIT: mm	
CHECKED	EDITION: 1	MATERIAL
APPROVED	SHEET 1 OF 1	ABS UL-94 1/16" HB

SHOGYO

SHOGYO INTERNATIONAL CORP.
6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
TEL: (516) 921-9111 • FAX: (516) 921-3777
www.shogyo.com