
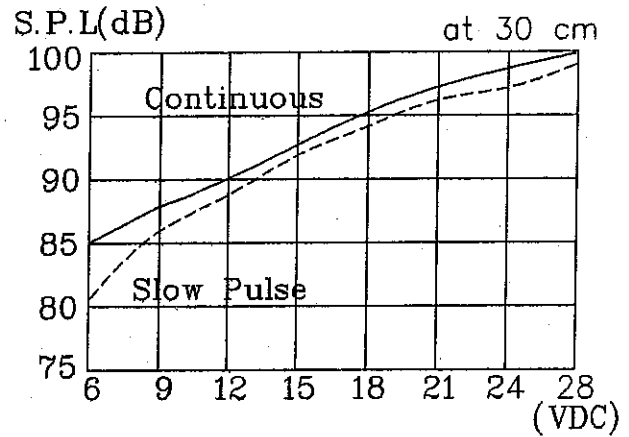


Unit: mm Tolerance: ± 0.5 mm

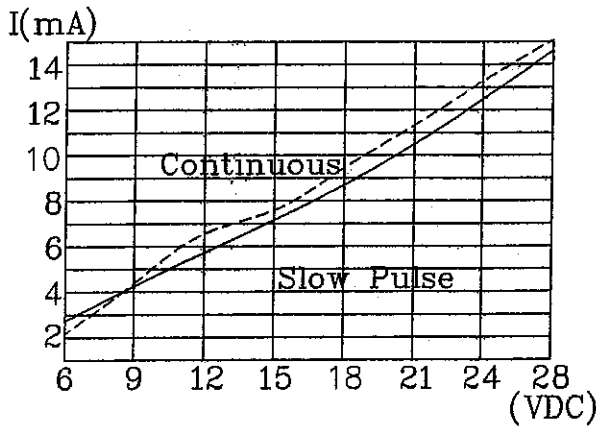

Oscillating Frequency (KHz)	3.6 \pm 0.5	
Operating Voltage (VDC)	6~28	
Current Consumption at 12 VDC (mA)	Maximum	8
	Typical	6
Sound Pressure Level at 12VDC/30cm (dB)	Minimum	82
	Typical	92
Tone(Continueous + Slow Pulse)	At 12VDC 1.2 \pm 20%Hz Slow Pulse	
Operating Temperature ($^{\circ}$ C)	-20~+60	
Storage Temperature ($^{\circ}$ C)	-30~+70	
Weight (Gram)	21.0	

TITLE		PIEZO AUDIO INDICATOR	PART NO.	3657(RoHS)
APPROVALS		SCALE:	1:1	
DRAWN FENG 06' 5/13		UNIT:	mm	
CHECKED		EDITION:	1	
APPROVED		SHEET	1 OF 1	
			DWG NO.	
			MATERIAL	ABS UL-94 1/16" HB

SHOGYO

SHOGYO INTERNATIONAL CORP.
6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
TEL: (516) 921-9111 FAX: (516) 921-3777
www.shogyo.com