



DETAIL "B" S=6

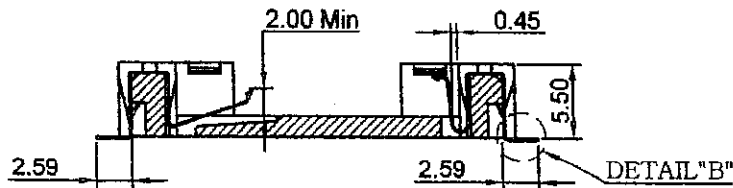

SECTION: A-A

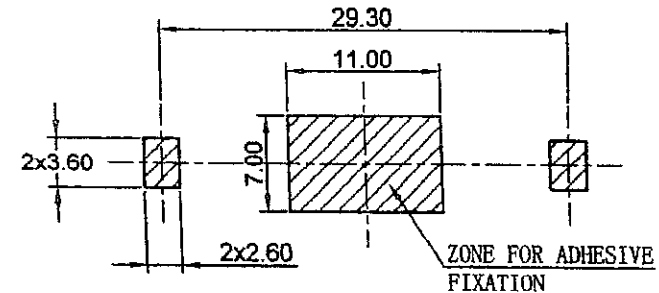

PCB MOUNTING LAYOUT

NOTES

△ 1. MATERIAL:

HOUSING: LCP+30%GF UL94V0 WHITE COLOR
 CONTACT: PHOSPHOR BRONZE 0.15 THICKNESS
 GOLD 1U" PLATED OVER Ni 50U" MIN

- 2. CURRENT RATING : 2A (AC/DC)
- 3. VOLTAGE RATING : 500V (AC/DC)
- 4. CONTACT RESISTANCE: 30 MILLIOHMS
- 5. INSULATION RESISTANCE: 500 MEGAOHMS
- 6. TEMPERATURE RANGE: -55°C TO +85°C
- 7. HUMIDITY: 40°C AND 90-95% RH FOR 96 HOURS
- 8. RoHS COMPLIANT

3		
2		
△	Changed contact specification	Aug/30/12
NO.	MODIFICATION	DATE
General Tolerances		
0 ~ >3	± 0.10	30 ~ >120 ± 0.30
3 ~ >6	± 0.10	120 ~ >400 ± 0.50
6 ~ >30	± 0.20	Angle: ± 3°



SCALE	2:1
UNIT	MM
MAT'L	SEE NOTES
DATE	MAY. 16. 2008

SHOGYO INTERNATIONAL CORP.
#CH-28-2032LF (GOLD CONTACT)
 COIN CELL HOLDER