SPECIFICATIONS

CONTACT RATING: AC/DC 42 V, 100mA
MECHANICAL LIFE: 1,000,000 cycles
CONTACT RESISTANCE: 100mΩ max.(initial)
INSULATION RESISTANCE: 1,000MΩ min. 100VDC
DIELECTRIC STRENGTH: 250VAC/1 min.
OPERATING TEMPERATURE: -40℃ to +80℃

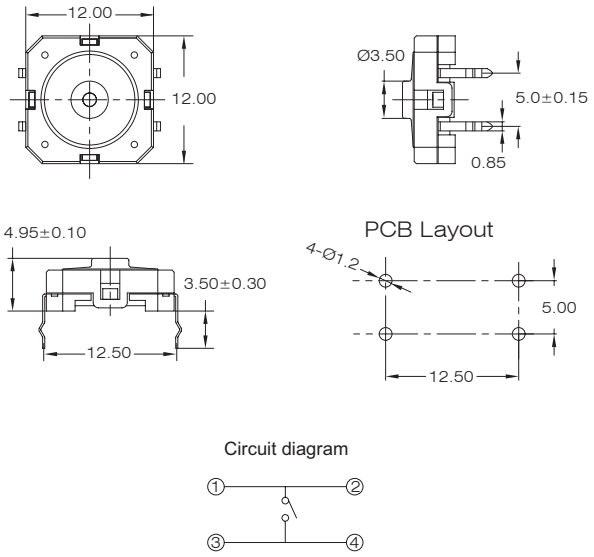

DTR-12-6-C

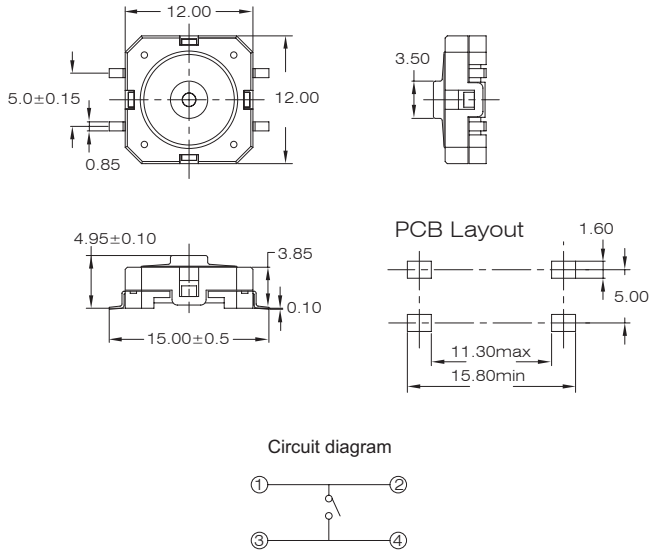

DTR-12-6-M

HOW TO ORDER

DTR - ☐ - ☐ - ☐ - ☐ - ☐ - ☐ - ☐ - ☐

DUSTPROOF TACT SWITCH | SIZE | OPERATION FORCE | HEIGHT | TERMINAL | CAP | PACKAGE | RoHS code:

12=12x12

6 : 300gf
8 : 600gf
9 : 400gf

☐ = 4.95mm
1 = 6.30mm

C : P.C TYPE
C1 : P.C TYPE
M : SMT TYPE

Plunger option:
☐ = without plunger
T1 = Total height 9.7
T2 = Total height 12.5

☐ = standard: Tube
T/R =Tape & Reel

H :RoHS Compliant

The dimensions in the catalogue and website are for reference only, not suitable for formal acknowledge.