

JS-606Q SERIES (D.P Mini Rocker Switch)

SPECIFICATIONS

1. Rating: 10A 125 VAC/6A 250 VAC
2. Contact resistance: 30 mΩ(max.)
3. Insulation resistance: DC 500V 100MΩ(Min)
4. Dielectric strength: 1500 VAC/ 1minute
5. Safety approval:

JS-606Q - - - -

Circuit		
B1	3P	ON-ON
B2	6P	ON-ON
C1	3P	ON-OFF-ON
C2	6P	
C3	9P	(ON)-OFF
D1	2P	
D2	4P	ON-(OFF)
E1	2P	
E2	4P	(ON)-ON
F1	3P	
F2	6P	ON-OFF-(ON)
H1	3P	
H2	6P	



Color Rocker/Housing	
B	Black
W	White
I	Ivory
H	Gray
S	Slate Gray

Stamp					
1	2	3	4	5	6


RoHS code
H = RoHS Compliant

()....Momentary

JS-606Q-C2-B/B-6

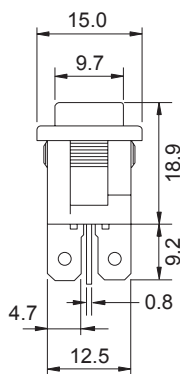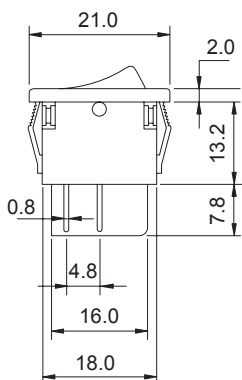

W	Panel Thickness
19.2	0.75-1.25
19.4	1.25-2.0
19.8	2.0-3.0



JS-606Q-E2-S/S-1



JS-606Q-H2-W/W-1



JS-606Q-H2-S/S-1



JS-606Q-C2-H/H-1

