

LT4



**SPECIFICATIONS**

CONTACT RATING: 100mA, 42VAC/DC  
 MECHANICAL LIFE: 1,000,000 cycles  
 CONTACT RESISTANCE: 100mΩ max.(initial)  
 INSULATION RESISTANCE: 1,000MΩ min.  
 DIELECTRIC STRENGTH: 1,500VAC  
 OPERATING TEMPERATURE: -25°C to +70°C

INDEX

TOGGLE





ROCKER

SLIDE

PUSH BUTTON

DIP

TACT

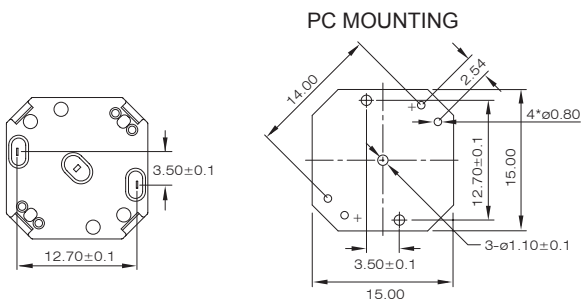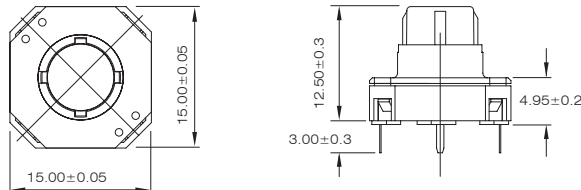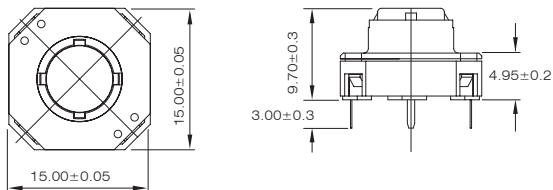

LT4-15-1

LT4-15-2

**HOW TO ORDER**

LT4 - 15 - HT -  -  -  -  -  -

LT Series  
 size:  
 19: 19×19mm  
 15: 15×15mm  
 HT Material:  
 HT = HIGH Temperature  
 Height:  
 1: 9.7 mm  
 2: 12.5 mm

LED quantity:  
 0: no LED  
 1: one LED  
 2: two LED

LED Size :  
 A: φ 3mm LED  
 B: 2mm LED

RoHS CODE:  
 H =RoHS Compliant

Another LED Color:  
 1:white  
 3: red  
 5: yellow  
 6: green  
 7: blue

LED Color:  
 1:white  
 3: red  
 5: yellow  
 6: green  
 7: blue