

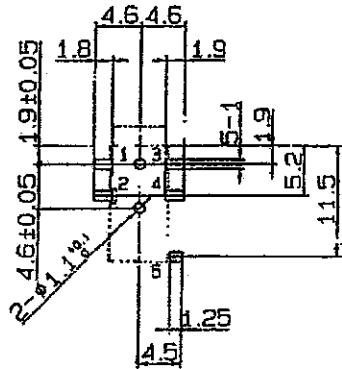





NOTE: CONTACT RESISTANCE - 30 miliohm Max.  
 INSULATION RESISTANCE - 100 Megaohm min.  
 @500 VDC  
 DIELECTRIC STRENGTH - 500 VAC for one minute.  
 LIFE CYCLE - 5,000 cycles min.



プリント基板半田付け部参照図  
 FOOT PRINT

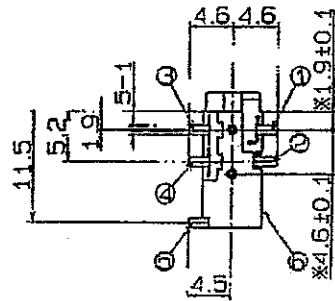

※印は位置決めピンの寸法を示す。



6	HOUSING	1	PA46	BLACK	UL94HB
5	TERMINAL T	1	C1720R	AG-P	t0.25
4	TERMINAL E	1	TiCuR	AG-P	t0.2
3	TERMINAL E	1	TiCuR	AG-P	t0.2
2	TERMINAL B	1	TiCuR	AG-P	t0.2
1	TERMINAL A	1	TiCuR	AG-P	t0.2
No	PART NAME	QTY	MATERIAL	FINISH	
	図 考				
	φ3.5	4	JACK		

SHOGYO INTERNATIONAL CORP.

#M03-925A0