


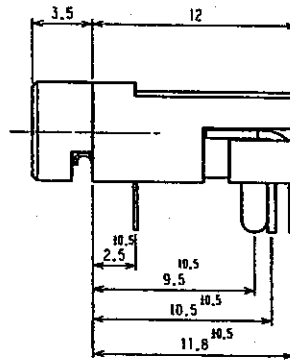
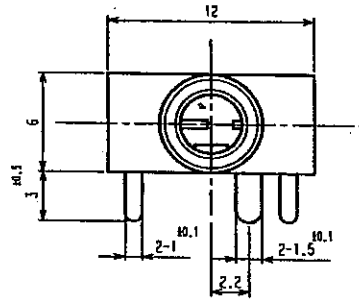


SPECIFICATION

1. WITHSTAND VOLTAGE : 500V AC FOR 1 MINUTE.
2. INSULATION RESISTANCE : 100MΩ MIN. AT 500V DC.
3. CONTACT RESISTANCE : 50mΩ MAX



HOLE LAYOUT
(BOTTOM VIEW)



LET	PART NAME	MATERIAL	QTY	FINISH	NOTE
6	BREAK-SHUNT SPRING	BRASS t=0.4	1	Ag	
5	RING SPRING	PBS t=0.5	1	Ag	
4	TIP SPRING	PBS t=0.5	1	Ag	
3	SLEEVE SPRING	FAB t=0.2	1	Ag	
2	BODY	PBT	1		
1	SLEEVE METAL	BRASS	1	Ni	

TOLERANCE	SCALE	DATE
±0.3	4/1	99/5/20

SHOGYO INTERNATIONAL CORP.

MJ-156L