


SPECIFICATION

- 1. RATING : DC12V 1A
- 2. DIELECTRIC STRENGTH
AC500V for 1minute
- 3. INSULATION RESISTANCE:
- 4. CONTACT RESISTANCE:
30mΩ min

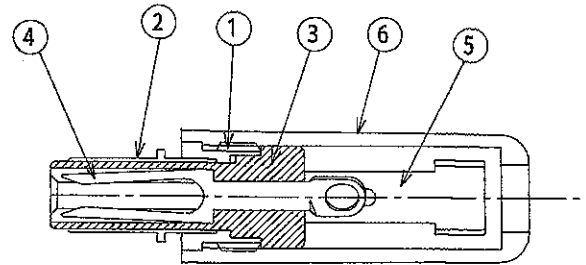

A	
MP121AR	$\phi 2.1^{+0.1}_{-0}$
MP122AR	$\phi 2.5^{\pm 0.05}$

RoHS
COMPLIANT

TOLERANCE	SCALE	DATE
±0.3	2/1	14/7/10

6	CAP	ABS	1		
5	TERMINAL	STEEL t=0.4	1	Ni	
4	CONTACT	FAB t=0.6	1	Ni	
3	INSULATION	POM	1		
2	SLEEVE	BRASS	1	Ni	
1	METAL	BRASS	1	Ni	
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE

SHOGYO INTERNATIONAL CORP.
MP-121AR/MP-122AR