

Mark	REVISION	DATE
△	Material changed	05/12/20


Rating: Current  
MAX. 1A 12V. DC

Dielectric Strength  
500V. AC for 1 minute

Insulation Resistance  
100MΩ min. @500V. DC

Contact Resistance  
50mΩ MAX.

INNER DIA. A	
MP-121C	φ2.1 <sup>+0.05</sup> / <sub>-0.03</sub>
MP-122C	φ2.5 <sup>+0.05</sup>

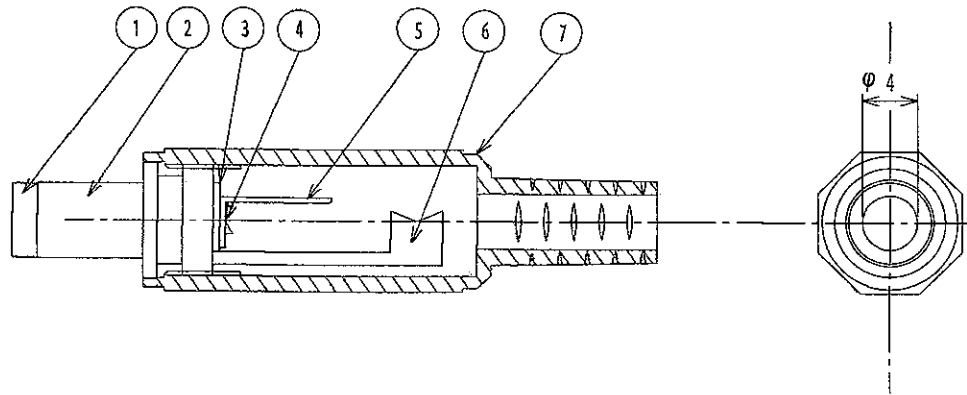

7	CAP	1	PE	
6	TERMINAL B	1	BSR	Ni-P
5	TERMINAL A	1	BSR	Ni-P
4	CONTACT B	1	BSBM	Ni-P
3	INSULATOR B	1	BAKELITE	
2	CONTACT A	1	BSBM	Ni-P
1	INSULATOR A	1	POM △	
No	PART NAME	QTY	MATERIAL	FINISH

TOLERANCE	SCALE	DATE	DESING
±0.3	2/1	030708	93/4/20

**SHOGYO INTERNATIONAL CORP.**

**#MP-121C/MP-122C**