
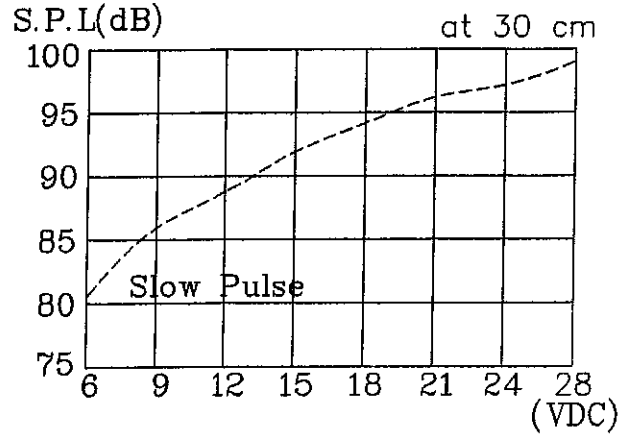


Unit: mm Tolerance: ± 0.5 mm

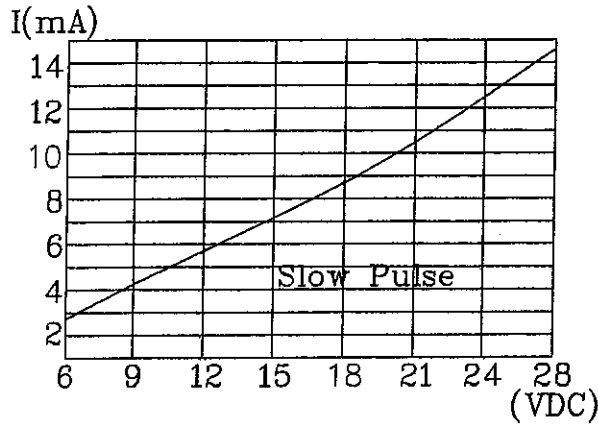

Oscillating Frequency (KHz)	3.6 \pm 0.5	
Operating Voltage (VDC)	6~28	
Current Consumption at 12 VDC (mA)	Maximum	8
	Typical	6
Sound Pressure Level at 12VDC/30cm (dB)	Minimum	82
	Typical	92
Tone	At 12VDC 1.2 \pm 20%Hz Slow Pulse	
Operating Temperature ($^{\circ}$ C)	-20~+60	
Storage Temperature ($^{\circ}$ C)	-30~+70	
Weight (Gram)	21.0	

TITLE PIEZO AUDIO INDICATOR		PART NO. SC3653(RoHS)
APPROVALS	SCALE: 1:1	MATERIAL ABS UL-94 1/16" HB
DRAWN	UNIT: mm	
CHECKED	EDITION: 1	
APPROVED	SHEET 1 OF 1	

SHOGYO

SHOGYO INTERNATIONAL CORP.
 6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
 TEL: (516) 921-9111 • FAX: (516) 921-3777
 www.shogyo.com