
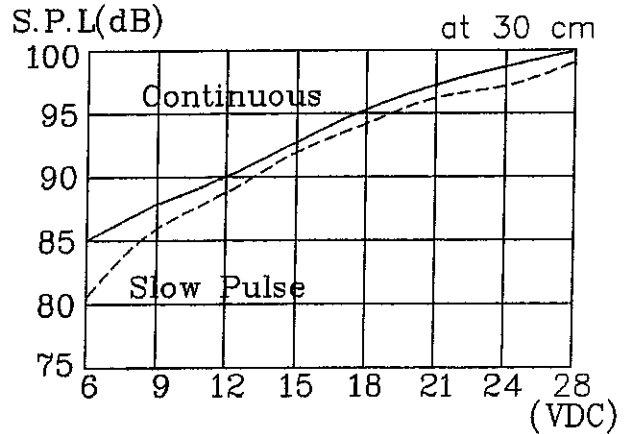


Unit: mm

Tolerance: ± 0.5 mm

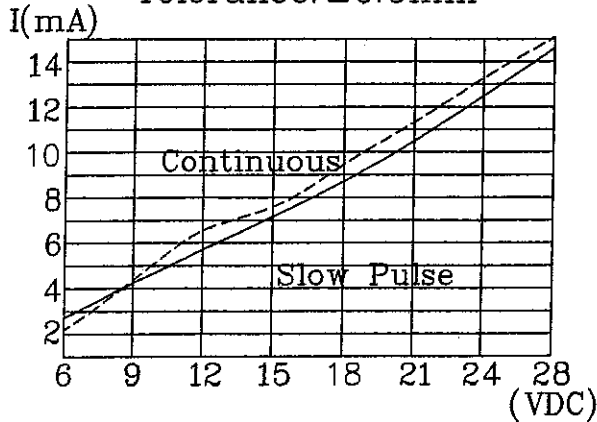

Oscillating Frequency (KHz)	3.6 \pm 0.5	
Operating Voltage (VDC)	6~28	
Current Consumption at 12 VDC (mA)	Maximum	8
	Typical	6
Sound Pressure Level at 12VDC/30cm (dB)	Minimum	82
	Typical	92
Tone	Continuous	At 12VDC 1.2 \pm 20%Hz Slow Pulse
Operating Temperature ($^{\circ}$ C)	-20~+60	
Storage Temperature ($^{\circ}$ C)	-30~+70	
Weight (Gram)	21.0	

TITLE		PIEZO AUDIO INDICATOR	PART NO.	SC3657(RoHS)
APPROVALS	SCALE:	1:1		
DRAWN	UNIT:	mm		
CHECKED	EDITION:	1	MATERIAL	
APPROVED	SHEET	1 OF 1	ABS UL-94 1/16" HB	

SHOGYO

SHOGYO INTERNATIONAL CORP.
 6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
 TEL: (516) 921-9111 • FAX: (516) 921-3777
 www.shogyo.com