

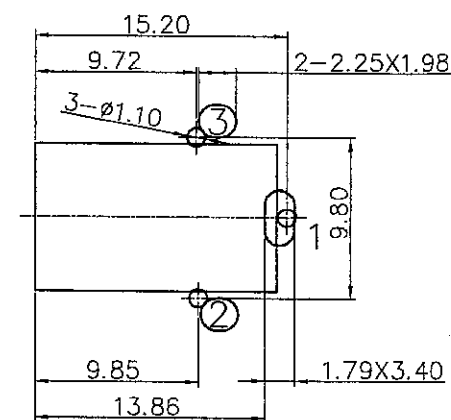
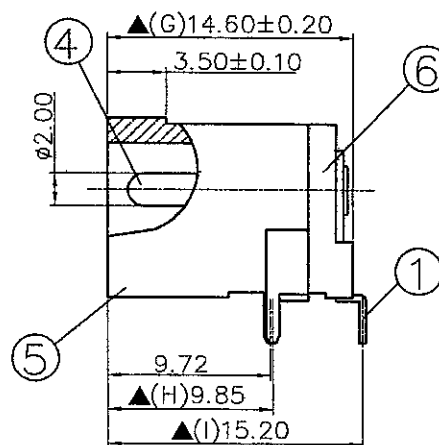


SCHEMATIC	
MODEL NO	C

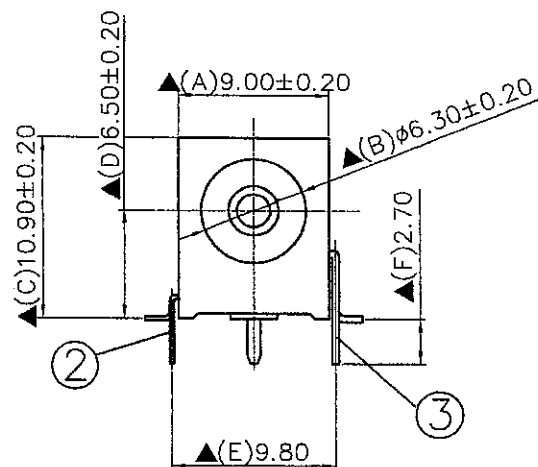

Pin Hole Layout
(Jack Bottom View)

6.	Cover	PA9T	1	Black Color
5.	Housing	PA9T	1	Black Color
4.	Pin(2.0Ø)	Copper	1	Nickel Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Sleeve Spring	0.25T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

		DATE	DWN	CHKD	APVD	MANAGER
		11.06.2012				
PART NAME : DC POWERJACK		VERSION:5.0				
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED		UNIT:mm			SCALE:/	

RoHS Pb Free Process	For Reference 僅供參考
-------------------------	-----------------------

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Current Rating : Max 5.0A , 16V DC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲ : The Most Important Dimension

SHOGYO INTERNATIONAL CORP.
#SCD446CCS000B00G