



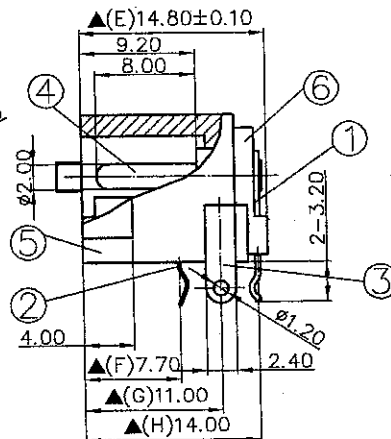
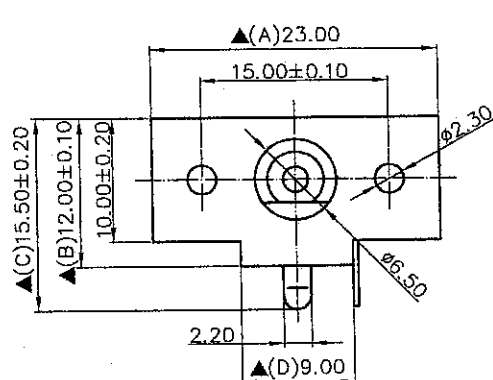


SCHEMATIC	
MODEL NO	C



6.	Cover	PBT+Fibre Glass	1	Black Color
5.	Housing	PBT+Fibre Glass	1	Black Color
4.	Pin(2.0Φ)	Copper	1	Nickel Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Sleeve Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

		DATE	DWN	CHKD	APVD	MANAGER
		11.12.2012				
PART NAME: DC POWER JACK		VERSION:4.0				
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED		UNIT:mm	⊕	≡	SCALE:1/1	

RoHS Compliant	For Reference 僅供參考
-------------------	-----------------------

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Current Rating : Max 5.0A , 24V DC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲ : The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

#SCD458CCS003B00G