

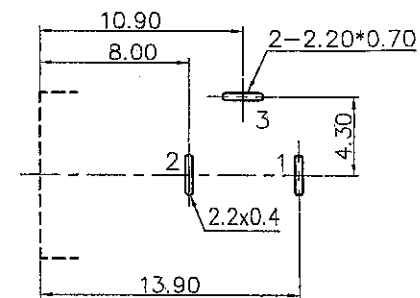
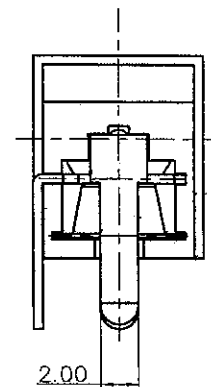
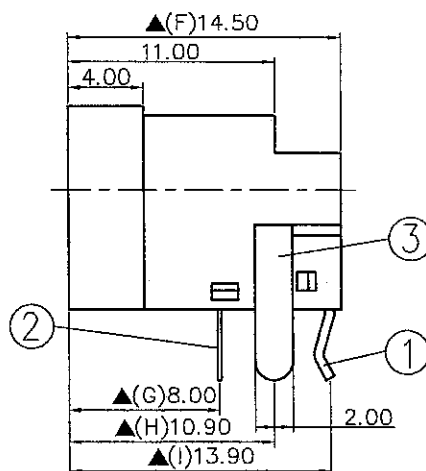
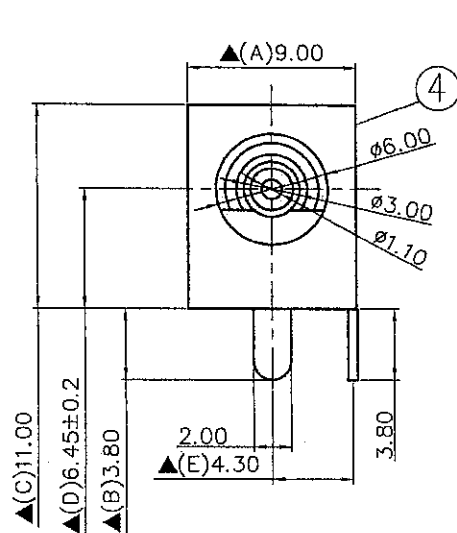



SCHEMATIC	
MODEL NO	C



Pin Hole Layout
(Jack Bottom View)

4.	Housing	PBT	1	Black Color
3.	Break Terminal	0.5T Bronze	1	Silver Plated
2.	Ring Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.5T Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

		DATE	DWN	CHKD	APVD	MANAGER
		11.12.2012				
PART NAME :DC POWER JACK					VERSION:5.0	
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED			UNIT:mm		SCALE:1/1	

RoHS Compliant	For Reference 僅供參考
-------------------	-----------------------

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Current Rating : Max 5.0A ,24VDC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

#SCD460ECS00SB00G