

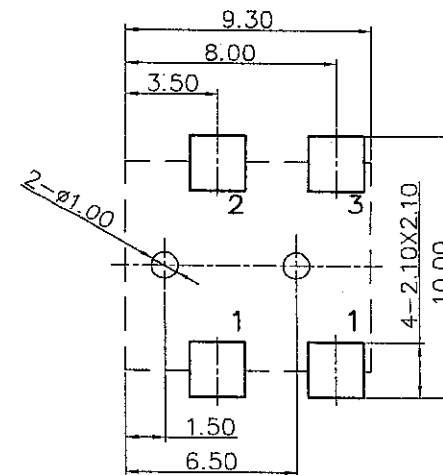
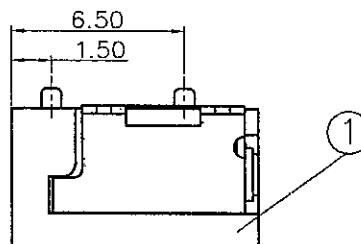
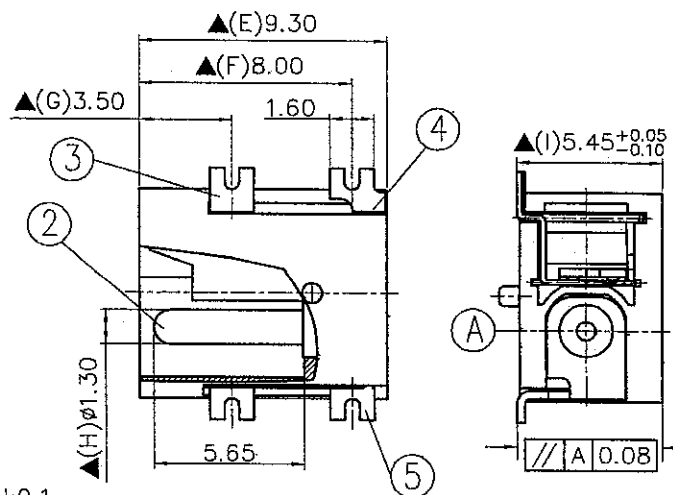
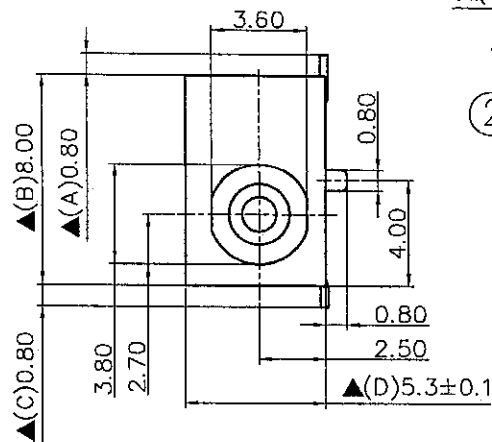


SCHEMATIC	
CODE NO	C



Pin Hole Layout
(Jack Bottom View)

5.	Spring	0.3T Phosphor Bronze	1	Silver Plated
4.	Break Terminal	0.2T Bronze	1	Silver Plated
3.	Pin Terminal	0.3T Bronze	1	Silver Plated
2.	Pin(Ø1.3)	Brass	1	Silver Plated
1.	Housing	PA10T	1	Black Color
NO.	Description	Material	Q'TY	Finish

		DATE	DWN	CHKD	APVD	MANAGER
		06.14.2012				
PART NAME : DC POWER JACK					VERSION:7.0	
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED			UNIT:mm		SCALE:1/1	

RoHS
Pb Free Process

For Reference
僅供參考

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Current Rating : Max 5A , 24VDC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

#SCD473ACS000B00G