

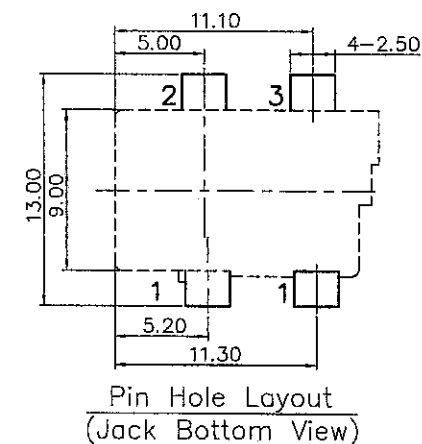
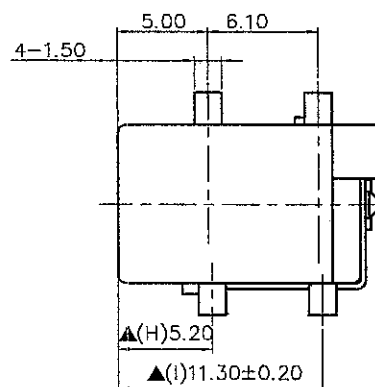

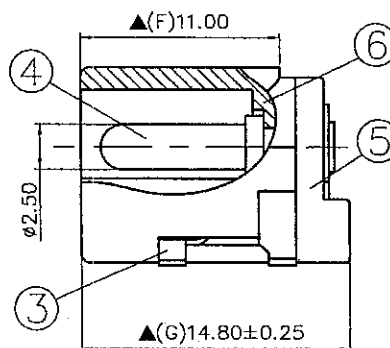
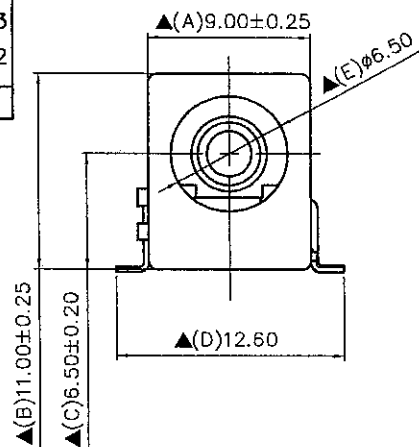


SCHEMATIC	
MODEL NO	C



6.	Housing	PA9T	1	Black Color
5.	Cover	PA9T	1	Black Color
4.	Pin(2.5φ)	Copper	1	Nickel Plated
3.	Sleeve Spring	0.3T Phosphor Bronze	1	Silver Plated
2.	Pin Terminal	0.3T Bronze	1	Silver Plated
1.	Break Terminal	0.4T Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

		DATE	DWN	CHKD	APVD	MANAGER
		11.22.2012				
PART NAME :DC POWER JACK					VERSION:5.0	
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED			UNIT:mm		SCALE:1/1	

RoHS
Pb Free Process

For Reference
僅供參考

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Current Rating : Max 5.0A , 24VDC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲ : The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

#SCD481DCS000B00G