

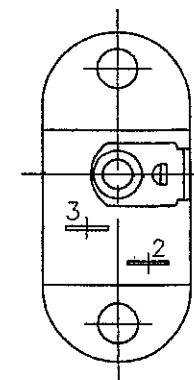
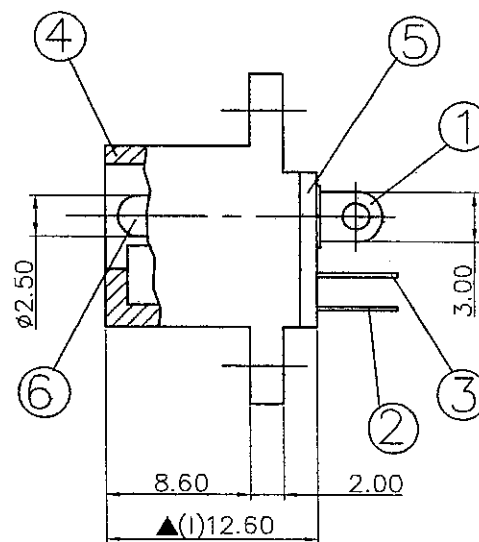


SCHEMATIC	
MODEL NO	C

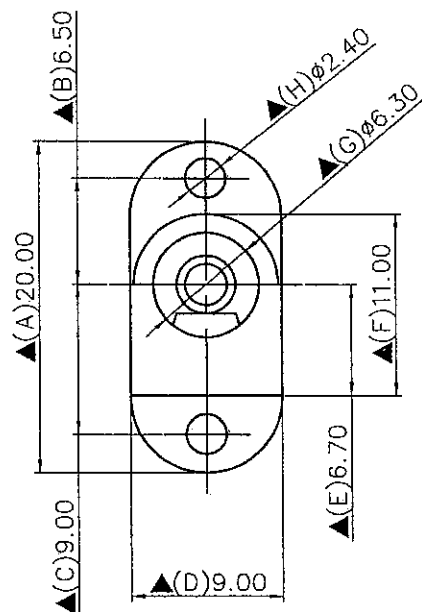

6.	Pin(2.5φ)	Copper	1	Nickel Plated
5.	Cover	1.0T Bakelite	1	Natural
4.	Housing	POM	1	Black Color
3.	Break Terminal	0.3T Bronze	1	Silver Plated
2.	Sleeve Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.4T Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD	APVD	MANAGER
11.22.2012				

PART NAME :DC POWER JACK	VERSION:5.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm  SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Current Rating : Max 5.0A , 24VDC
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考

SHOGYO INTERNATIONAL CORP.

#SCD510DCS000B00G