






V



X



Y

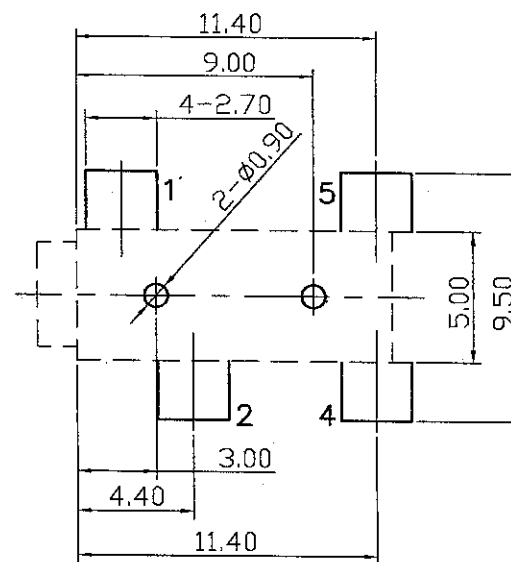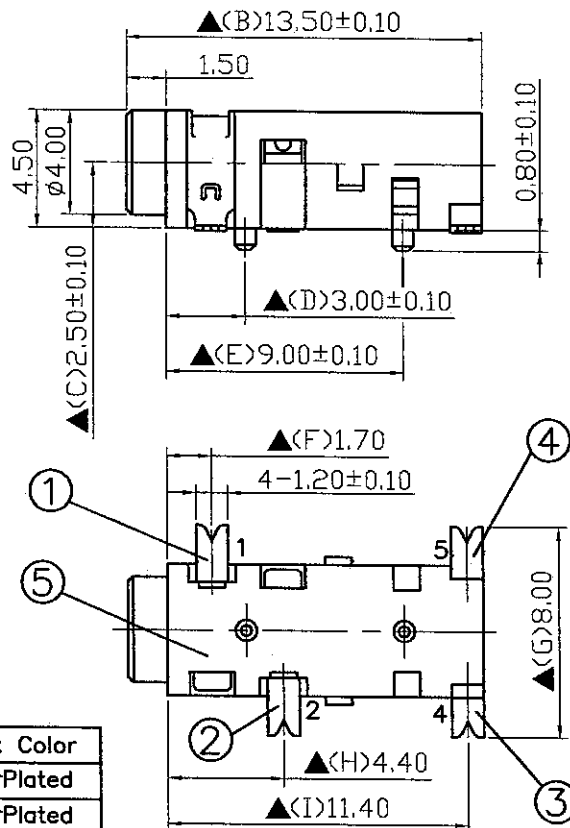

Pin Hole Layout
(Jack Bottom View)

5.	Housing	PA9T	1	Black Color
4.	Tip Spring	0.3T Phosphor Copper	1	SilverPlated
3.	Break Terminal	0.3T Brass	1	SilverPlated
2.	Ring Spring	0.2T Phosphor Copper	1	SilverPlated
1.	Earth Terminal	0.2T Phosphor Copper	1	SilverPlated
NO.	Description	Material	QTY	Finish

DATE	DWN	CHKD
12.02.2005		

PART NAME : 2.5φ PHONE JACK

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm

RoHS
Pb Free Process

For Reference
僅供參考

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

SCJ232P00(*)S0B00G