

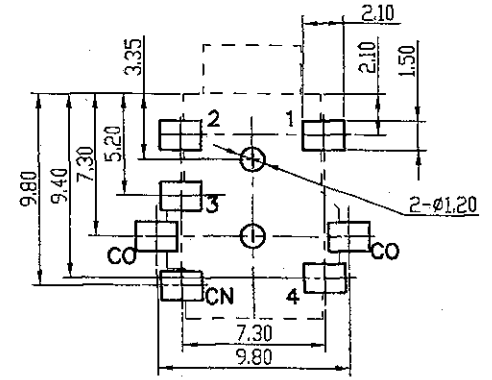
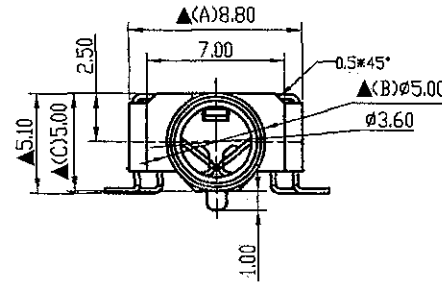





D

R



Pin Hole Layout
(Jack Bottom View)

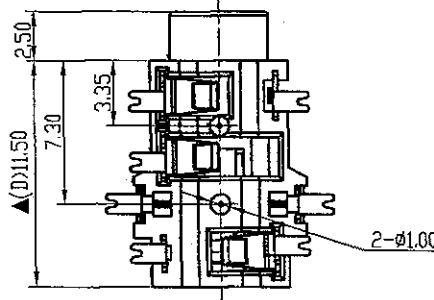

5.	Make Contct	0.25T Brass	1	Silver Plated
4.	Contact	0.25T Phosphor Bronze	3	Silver Plated
3.	Transfer Contct	0.25T Phosphor Bronze	1	Silver Plated
2.	Earth Contct	0.25T Phosphor Bronze	1	Silver Plated
1.	Housing	PA66	1	Black Color
NO.	Description	Material	Q*TY	Finish

DATE	DWN	CHKD
10.07.2011		

PART NAME : 3.5φ PHONE JACK

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm

RoHS
Pb Free Process

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲ : The Most Important Dimension

SHOGYO INTERNATIONAL CORP.
SCJ305P00(*)S0B00G