









L



X



Z

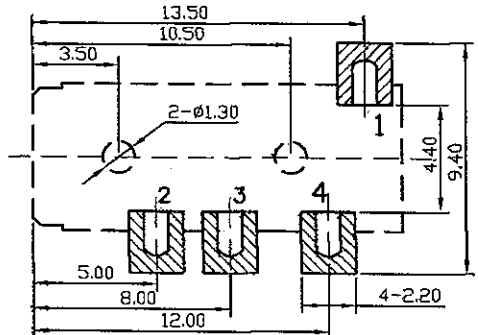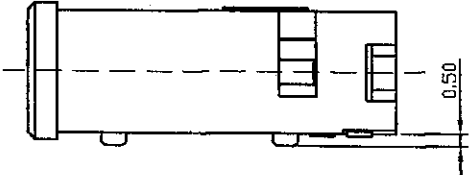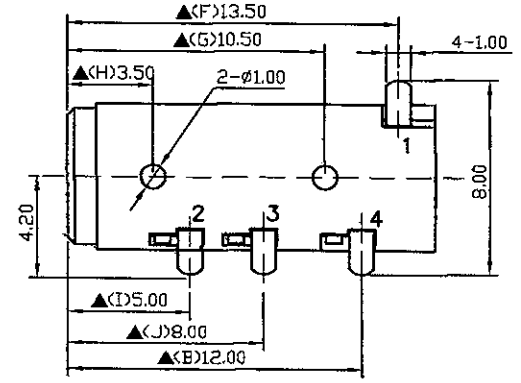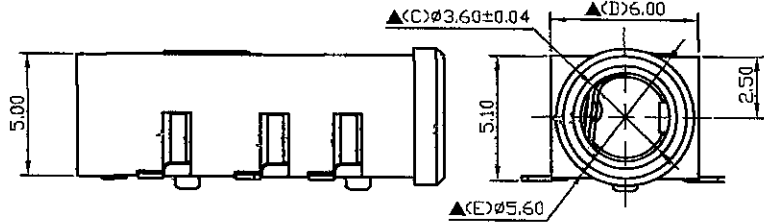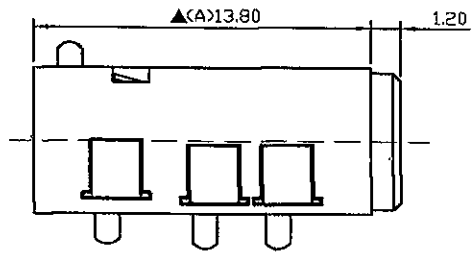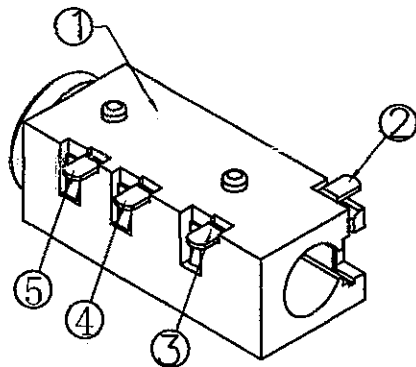

Pin Hole Layout
(Jack Bottom View)

RoHS
Pb Free Process

5.	Break Terminal	0.2T Phosphor Bronze	1	Silver Plated
4.	Tip Spring	0.2T Phosphor Bronze	1	Silver Plated
3.	Ring Spring	0.2T Phosphor Bronze	1	Silver Plated
2.	Earth Terminal	0.2T Phosphor Bronze	1	Silver Plated
1.	Housing	PA9T	1	Black Color
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD
12.26.2011		

PART NAME : 3.5φ PHONE JACK

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲ : The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

SCJ322P00(*)S0B00G