

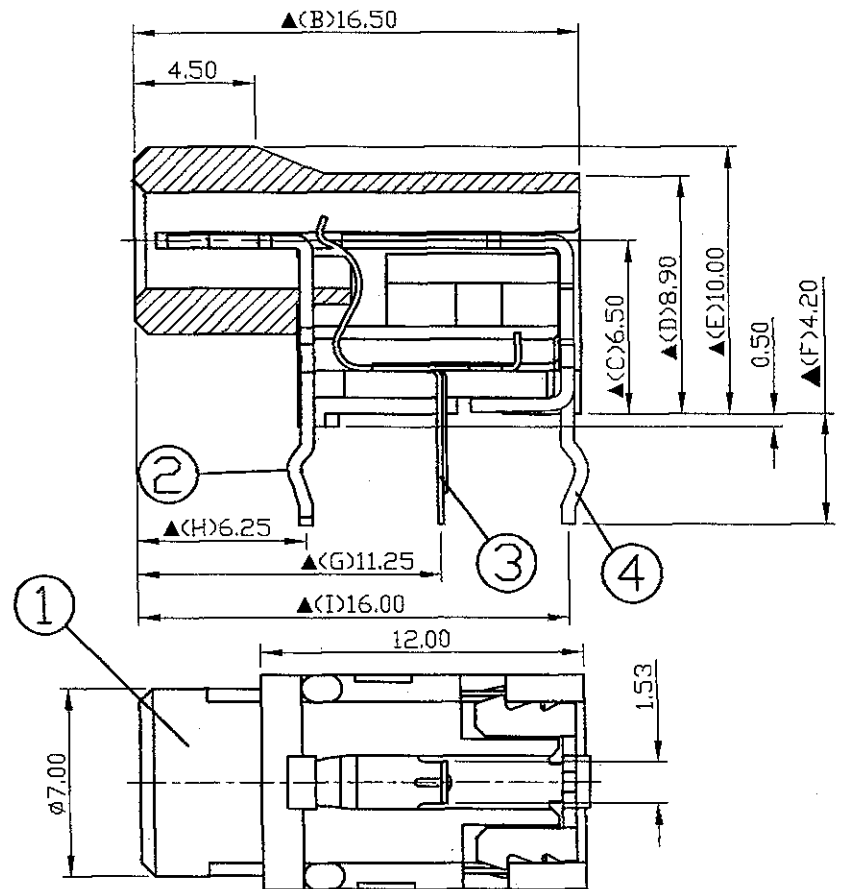


SCHEMATIC	
MODEL NO	X

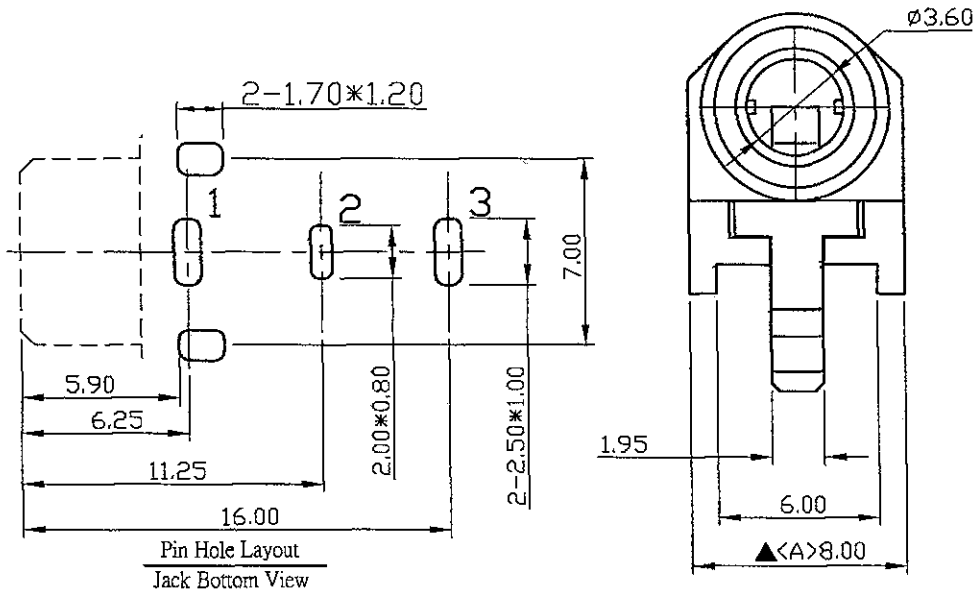

NO.	Description	Material	Q'TY	Finish
4.	Ring Spring	0.5 Brass	1	Silver Plated
3.	Tip Spring	0.2 Phosphor Bronze	1	Silver Plated
2.	Sleeve Spring	0.5 Brass	1	Silver Plated
1.	Housing	PBT	1	Black Color

DATE	DWN	CHKD
01.04.2012		

RoHS
Compliant

SPECIFICATIONS:

Contact Resistance : 30mΩ-max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

SCJ337P00XS0B00G

PART NAME: 3.5φ PHONE JACK

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm 