


13.	Metal Shell	0.2T Brass	1	Silver Plated
12.	Cover	PBT	1	Black Color
11.	Housing	PBT	1	Black Color
10.	Tip Lead(TOP)	0.4T Brass	1	Silver Plated
9.	Tip Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
8.	Ring Lead(TOP)	0.4T Brass	1	Silver Plated
7.	Ring Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
6.	Earth Terminal(TOP)	0.4T Phosphor Copper	1	Silver Plated
5.	Tip Spring(DOWN)	0.25T Phosphor Copper	1	Silver Plated
4.	Break Terminal(DOWN)	0.4T Bronze	1	Silver Plated
3.	Break Terminal(DOWN)	0.4T Bronze	1	Silver Plated
2.	Ring Spring(DOWN)	0.3T Phosphor Copper	1	Silver Plated
1.	Earth Terminal(DOWN)	0.4T Phosphor Copper	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

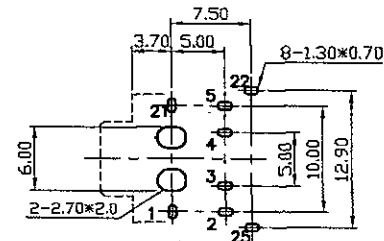

Pin Hole Layout
(Jack Bottom View)

RoHS
Compliant

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲ : The Most Important Dimension

	DATE	DWN	CHKD
	10.10.2011		
PART NAME : 3.5φ PHONE JACK			
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED		UNIT:mm	

SHOGYO INTERNATIONAL CORP.
 # SCJ351P00(*)S0BNSG