


M9XP0.75 METRIC THREAD  
W/O STOPPER

15	Washer	0.5T Steel	1	Nickel Plated
14	Nut	2.0T Steel	1	Nickel Plated
13	Insulator	POM	2	Ivory Color
12	Insulator	Red Vulcanited Fibre	1	Red Color
11	Barrel(W/Thread)	Brass	1	Nickel Plated
10	Cover	0.5T Steel	1	Nickel Plated
9	Housing	POM	1	Black Color
8.	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
7.	Transfer Terminal	0.3T Brass	1	Silver Plated
6.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
5.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
4.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
3.	Transfer Terminal	0.4T Brass	1	Silver Plated
2.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
1.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

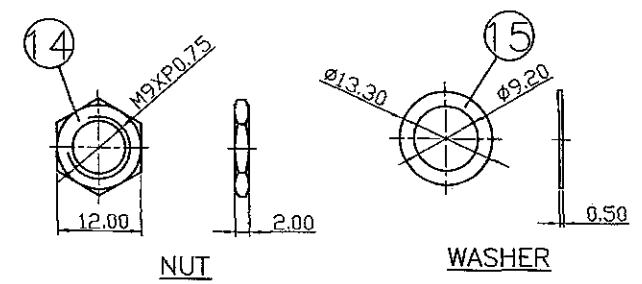

RoHS  
Compliant

SPECIFICATIONS:  
 Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute  
 Remark: ▲: The Most Important Dimension

		DATE	DWN	CHKD
		10.12.2011		
PART NAME : 6.3φ PHONE JACK				
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED			UNIT:mm	

**SHOGYO INTERNATIONAL CORP.**  
**# SCJ614M3N(\*)S3B11G**