
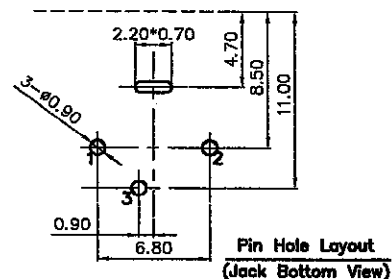


Arrangement of Contact



4.	Cover	PBT UL 94 V-0	1	Black Color
3.	Housing	PBT UL 94 V-0	1	Black Color
2.	Terminal	0.2T Phosphor Bronze	3	Sold Flash Plated Contact & Terminal Plated With Tin Over Sn(Tin) Nickel
1.	Inner Shield	0.35T Brass	1	Nickel Plating
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD	APVD	MANAGER
10.19.2011				

PART NAME :DIN JACK	VERSION:3.0
TOLERANCE:±0.3mm UNLESS OTHERWISE SPECIFIED UNIT:mm	SCALE:1/1

RoHS Compliant For Reference 僅供參考

SPECIFICATIONS:  
 Contact Resistance :30mΩ max  
 Insulation Resistance :100MΩ min.at DC500V  
 Dielectric Withstand Voltage:AC 500V for one minute  
 Remark:▲:The Most Important Dimension

**SHOGYO INTERNATIONAL CORP.**  
 #SCN551S3GTNB000G