



Arrangement of Contact

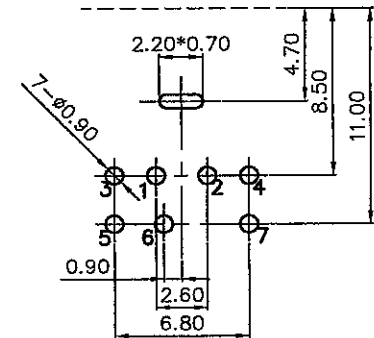

Pin Hole Layout  
(Jack Bottom View)



4.	Cover	PBT UL 94 V-0	1	Black Color
3.	Housing	PBT UL 94 V-0	1	Black Color
2.	Terminal	0.2T Phosphor Bronze	7	Gold Flash Plated Contact & Terminal Plated With Tin Over Side (Min.) Nickel
1.	Inner Shield	0.35T Brass	1	Nickel Plating
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD	APVD	MANAGER
10.19.2011				

PART NAME : MINI DIN JACK

VERSION:4.0

TOLERANCE:±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

RoHS  
Compliant

For Reference  
僅供參考

SPECIFICATIONS:

Contact Resistance :30mΩ max  
 Insulation Resistance :100MΩ min.at DC500V  
 Dielectric Withstand Voltage:AC 500V for one minute  
 Remark:▲:The Most Important Dimension

**SHOGYO INTERNATIONAL CORP.**

**#SCN551S7GTNB000G**