


Arrangement of Contact

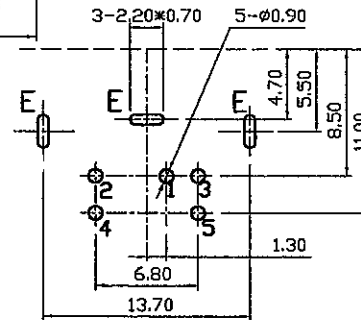

Pin Hole Layout
(Jack Bottom View)

4.	Cover	PBT UL 94 V-0	1	Black Color
3.	Housing	PBT UL 94 V-0	1	Black Color
2.	Metal Shell	0.3T Brass	1	Nickel Plating
1.	Terminal	0.2T Phosphor Copper	5	Gold flash Plated Contact & Terminal Plated With Tin Over 50u*(Min) Nickel
NO.	Description	Material	Q' TY	Finish

RoHS
Compliant

For Reference
僅供參考

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

	DATE	DWN	CHKD	APVD	MANAGER
	08.15.2007				

PART NAME : MINI DIN JACK	VERSION: 5.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm SCALE: 1/1

SHOGYO INTERNATIONAL CORP.

#SCN553S5GTNB010G