


Arrangement of Contact

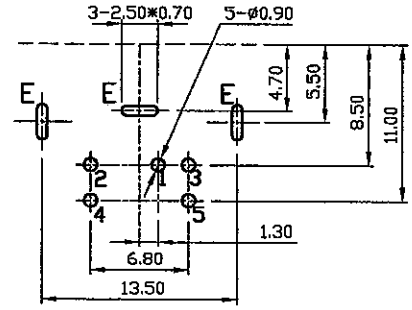

Pin Hole Layout
(Jack Bottom View)

5.	Panel Ground	0.20T Stainless Steel SUS301X3/4	1	
4.	Cover	PBT UL 94 V-0	1	Black Color
3.	Housing	PBT UL 94 V-0	1	Black Color
2.	Metal Shell	0.3T Brass	1	Nickel Plating
1.	Terminal	0.2T Phosphor Copper	5	Gold flash Plated Contact & Terminal Plated With Sn Over 50 μ (Min) Nickel
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD	APVD	MANAGER
03.22.2006				

PART NAME : MINI DIN JACK	VERSION:3.0
TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED	UNIT:mm SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30m Ω max
 Insulation Resistance : 100M Ω min. at DC 500V
 Dielectric Withstanding Voltage: 500V for one minute
 Remark: \blacktriangle : The Most Important Dimension

RoHS Compliant For Reference 僅供參考

SHOGYO INTERNATIONAL CORP.
#SCN553S5GTNB020G