
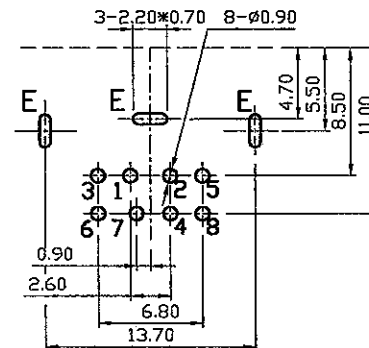


Arrangement of Contact



Pin Hole Layout  
(Jack Bottom View)

4. Cover	PBT UL 94 V-0	1	Black Color	
3. Housing	PBT UL 94 V-0	1	Black Color	
2. Metal Shell	0.3T Brass	1	Nickel Plating	
1. Terminal	0.2T Phosphor Copper	8	Gold flash Plated Contact & Terminal Plated With Tin Over 50u"(Min) Nickel	
NO.	Description	Material	Q' TY	Finish

RoHS Compliant For Reference 僅供參考

SPECIFICATIONS:  
 Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute  
 Remark: ▲: The Most Important Dimension

	DATE	DWN	CHKD	APVD	MANAGER
	08.15.2007				

PART NAME : MINI DIN JACK	VERSION:5.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm  SCALE:1/1

**SHOGYO INTERNATIONAL CORP.**  
**#SCN553S8GTNB010G**