


Arrangement of Contact

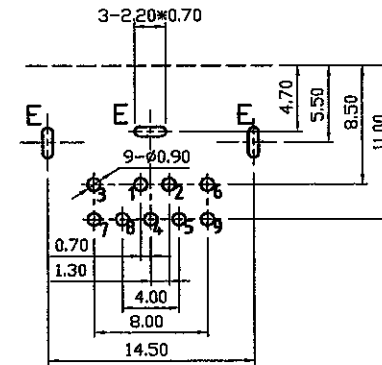

Pin Hole Layout  
(Jack Bottom View)

4.	Housing	PBT UL 94 V-0	1	Black Color
3.	Cover	PBT UL 94 V-0	1	Black Color
2.	Metal Shell	0.3T Brass	1	Nickel Plating
1.	Terminal	0.2T Phosphor Bronze	9	Gold Flash plated Contact & Terminal Plated with Tin Over 50U <sup>m</sup> (Min.) Nickel
NO.	Description	Material	Q'TY	Finish

RoHS Compliant For Reference 僅供參考

SPECIFICATIONS:  
 Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstand Voltage : AC 500V for one minute  
 Remark: ▲: The Most Important Dimension

		DATE	DWN	CHKD	APVD	MANAGER
		10.30.2008				
PART NAME : MINI DIN JACK					VERSION:6.0	
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED				UNIT:mm		SCALE:1/1

**SHOGYO INTERNATIONAL CORP.**

**#SCN553S9GTNB010G**