


Arrangement of Contact

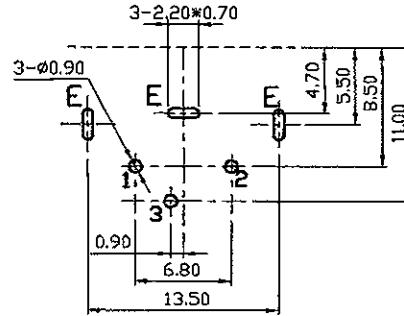

Pin Hole Layout
(Jack Bottom View)

4.	Cover	PBT UL 94 V-0	1	Black Color
3.	Housing	PBT UL 94 V-0	1	Black Color
2.	Metal Shell	0.3T Brass	1	Nickel Plating
1.	Terminal	0.2T Phosphor Bronze	3	Gold flash Plated Contact & Terminal Plated With Tin Over 50u"(Min) Nickel
NO.	Description	Material	Q'TY	Finish

	DATE	DWN	CHKD	APVD	MANAGER
	12.07.2007				

PART NAME : MINI DIN JACK	VERSION:7.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm
	SCALE:1/1

RoHS Compliant For Reference
備供參考

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

#SCN554S3GTNB010G