
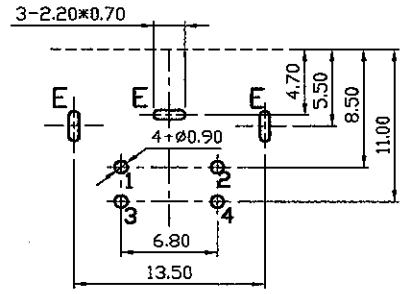


Arrangement of Contact



Pin Hole Layout
(Jack Bottom View)

4.	Cover	PBT UL 94 V-0	1	Black Color
3.	Housing	PBT UL 94 V-0	1	Black Color
2.	Metal Shell	0.3T Brass	1	Nickel Plating
1.	Terminal	0.2T Phosphor Bronze	4	Gold flash Plated Contact & Terminal Plated With Tin Over 50u*(Min) Nickel
NO.	Description	Material	QTY	Finish

DATE	DWN	CHKD	APVD	MANAGER
08.15.2007				

PART NAME : MINI DIN JACK	JG	VERSION:5.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

RoHS Compliant For Reference
値供参考

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

SHOGYO INTERNATIONAL CORP.
#SCN554S4GTNB010G