
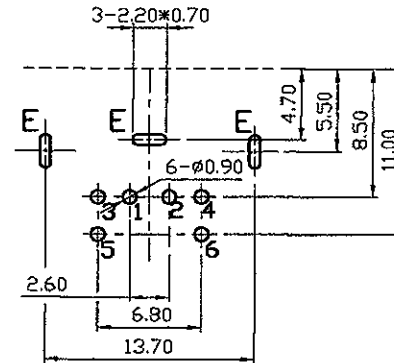


Arrangement of Contact



Pin Hole Layout
(Jack Bottom View)

4.	Cover	PBT UL 94 V-0	1	Black Color
3.	Housing	PBT UL 94 V-0	1	Black Color
2.	Metal Shell	0.3T Brass	1	Nickel Plating
1.	Terminal	0.2T Phosphor Bronze	6	Gold flash Plated Contact & Terminal Plated With Tin Over 50u"(Min) Nickel
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD	APVD	MANAGER
08.15.2007				

PART NAME : MINI DIN JACK

VERSION:5.0

TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

RoHS Compliant For Reference 僅供參考

SPECIFICATIONS:

Contact Resistance : 30m Ω max
 Insulation Resistance : 100M Ω min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: \triangle : The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

#SCN554S6GTNB010G