
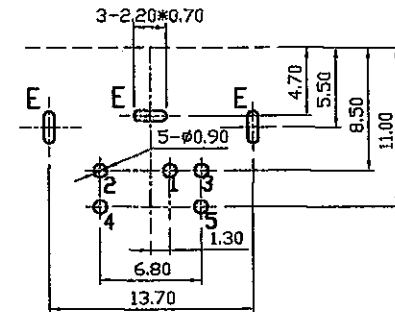


Arrangement of Contact



Pin Hole Layout
(Jack Bottom View)

5.	Housing	PBT UL 94 V-0	1	Black Color
4.	Cover	PBT UL 94 V-0	1	Black Color
3.	Metal Shell	0.5T Brass	1	Nickel Plating
2.	Panel Ground	0.2T Phosphor Bronze	1	Nickel Plating
1.	Terminal	0.2T Phosphor Bronze	5	Gold Flash plated Contact & Terminal Plated with Tin Over 50U"(Min.) Nickel
NO.	Description	Material	QTY	Finish

	DATE	DWN	CHKD	APVD	MANAGER
	12.12.2005				

PART NAME :MINI DIN JACK	VERSION:4.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm SCALE:1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

RoHS Compliant For Reference 僅供參考

SHOGYO INTERNATIONAL CORP.

#SCN556S5GTNB000G