


Arrangement of Contact

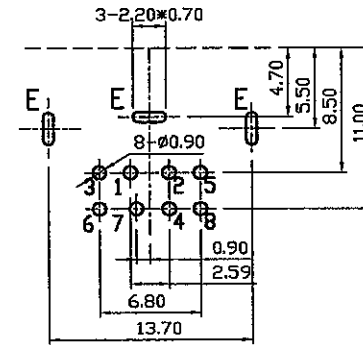

Pin Hole Layout
(Jack Bottom View)

5.	Housing	PBT UL 94 V-0	1	Black Color
4.	Cover	PBT UL 94 V-0	1	Black Color
3.	Metal Shell	0.3T Brass	1	Nickel Plating
2.	Panel Ground	0.2T Phosphor Bronze	1	Nickel Plating
1.	Terminal	0.2T Phosphor Bronze	8	Gold Flash plated Contact & Terminal Plated with Tin Over 50U*(Min.) Nickel
NO.	Description	Material	QTY	Finish

	DATE	DWN	CHKD	APVD	MANAGER
	12.12.2005				

PART NAME : MINI DIN JACK			VERSION:4.0		
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED			UNIT:mm		SCALE:1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考

SHOGYO INTERNATIONAL CORP.

#SCN556S8GTNB000G