
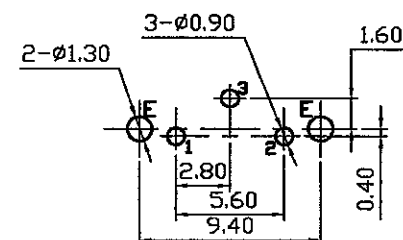


Arrangement of Contact

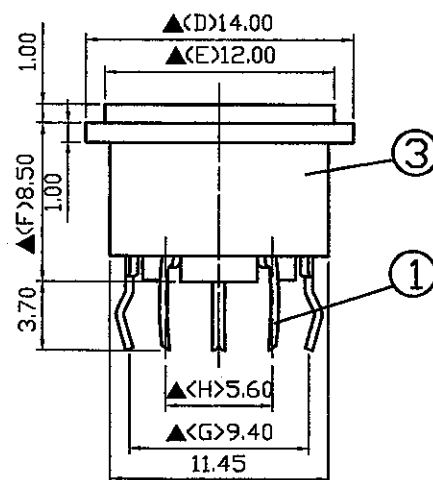

Pin Hole Layout  
(Jack Bottom View)

3.	Housing	PBT	1	Black Color
2.	Shell	0.4T Brass	2	Nickel Plating
1.	Terminal	0.2T Phosphor Bronze	3	Silver Plating
NO.	Description	Material	Q'TY	Finish

		DATE	DWN	CHKD	APVD	MANAGER
		06.19.2014	謝齊輝			
PART NAME :DIN JACK						VERSION:1.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED			UNIT:mm		SCALE:1/1	

SPECIFICATIONS:

Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute  
 Remark: ▲: The Most Important Dimension

RoHS  
Compliant

**SHOGYO INTERNATIONAL CORP.**

**#SCN572S3NS00003G**