



Arrangement of Contact

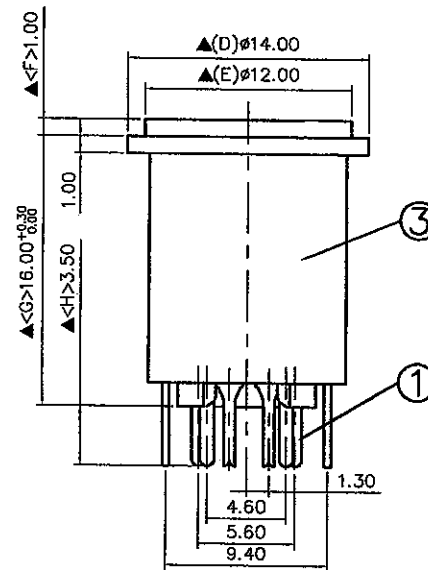

Pin Hole Layout  
(Jack Bottom View)

3.	Housing	PBT	1	Black Color
2.	Shell	0.4T Brass	1	Nickel Plating
1.	Terminal	0.2T Phosphor Bronze	6	Silver Plating
NO.	Description	Material	Q'TY	Finish

	DATE	DWN	CHKD	APVD	MANAGER
	10.19.2011				

PART NAME : DIN JACK		VERSION:4.0		
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED		UNIT:mm		SCALE:1/1

RoHS Compliant For Reference 僅供參考

SPECIFICATIONS:

Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute  
 Remark: ▲: The Most Important Dimension

**SHOGYO INTERNATIONAL CORP.**

**#SCN573S6NS0B000G**