


Arrangement of Contact

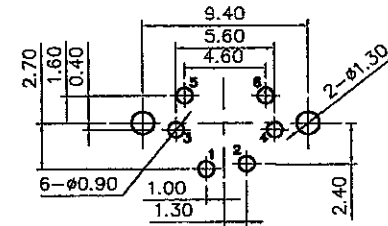

Pin Hole Layout  
(Jack Bottom View)

3.	Housing	PBT	1	Black Color
2.	Shell	0.4T Brass	1	Nickel Plating
1.	Terminal	0.2T Phosphor Bronze	6	Silver Plating
NO.	Description	Material	Q'TY	Finish


DATE	DWN	CHKD	APVD	MANAGER
10.19.2011				

PART NAME : DIN JACK

VERSION:4.0

TOLERANCE : $\pm 0.3$ mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

RoHS  
Compliant

For Reference  
僅供參考

SPECIFICATIONS:

Contact Resistance : 30m $\Omega$  max  
 Insulation Resistance : 100M $\Omega$  min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute.  
 Remark:  $\blacktriangle$ : The Most Important Dimension

**SHOGYO INTERNATIONAL CORP.**

**#SCN573S6NS0B003G**