



| | |
|-----------|---|
| SCHEMATIC |  |
| MODEL NO | V |

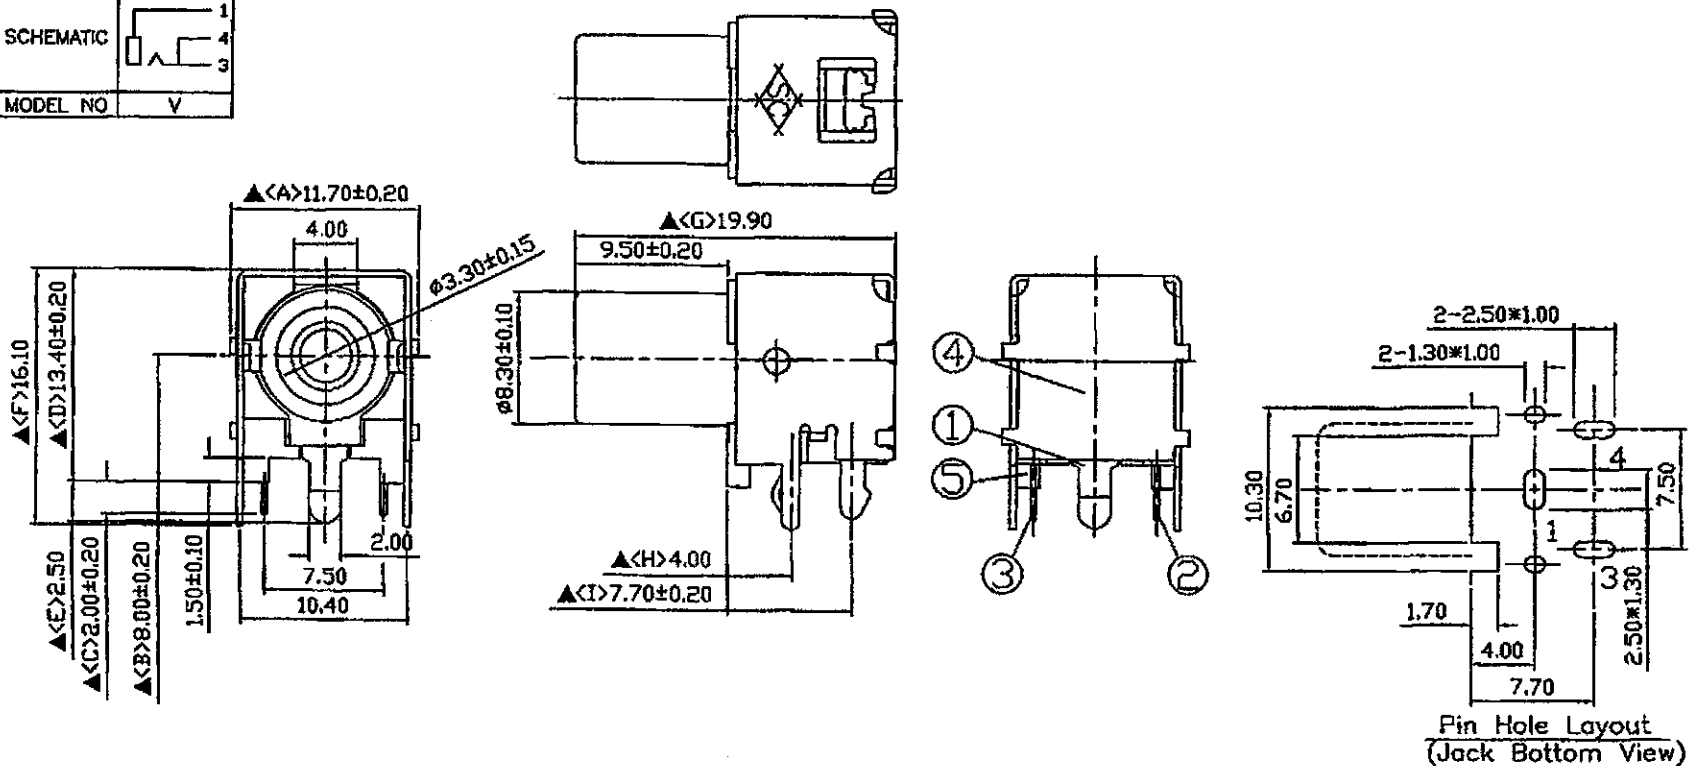

| NO. | Description | Material | Q'TY | Finish |
|-----|-------------------------|----------------------|------|---------------|
| 5. | Housing | PBT | 1 | Black Color |
| 4. | Metal Shell | 0.4T Iron | 1 | Nickel Plated |
| 3. | Spring Terminal | 0.3T Phosphor Bronze | 1 | Silver Plated |
| 2. | Break Terminal | 0.3T Phosphor Bronze | 1 | Silver Plated |
| 1. | Earth Terminal (Barrel) | 0.4T Brass | 1 | Nickel Plated |

| DATE | DWN | CHKD | APVD | MANAGER |
|------------|-----|------|------|---------|
| 10.18.2011 | 韩沙 | | | |

| | |
|---|-------------|
| PART NAME : PIN JACK | VERSION:4.0 |
| TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED | UNIT:mm |
| | SCALE:1/1 |

SPECIFICATIONS:

- Contact Resistance : 30mΩ max
- Insulation Resistance : 100MΩ min. at DC 500V
- Dielectric Withstand Voltage : AC 500V for one minute

Remark: ▲: The Most Important Dimension

RoHS Compliant

SHOGYO INTERNATIONAL CORP.
#SCP625VNS1N0000G