


A部詳圖: (塑柱 2/1)

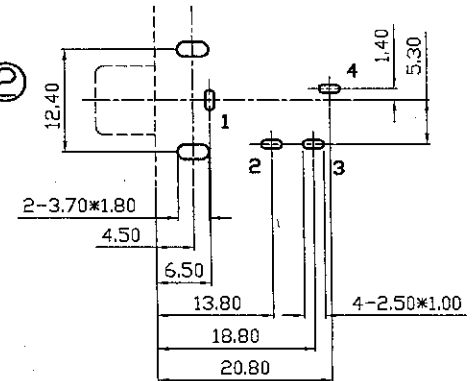

Pin Hole Layout
(Jack Bottom View)

NO.	Description	Material	Q'TY	Finish
10.	Housing D	PBT	1	Black Color
9.	Housing C	PBT	1	Red Color
8.	Housing T	PBT	1	White Color
7.	Base	ABS	1	Black Color
6.	Earth Terminal	0.2T Phosphor Bronze	1	Silver Plated
5.	Barrel	0.5T Brass	3	Nickel Plated
4.	Terminal T	0.5T Brass	1	Silver Plated
3.	Terminal C	0.5T Brass	1	Silver Plated
2.	Terminal D	0.5T Brass	1	Silver Plated
1.	Earth Terminal D	0.5T Brass	1	Nickel Plated

RoHS Compliant For Reference 僅供參考

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

		DATE	DWN	CHKD
		10.21.2008		
PART NAME : PIN JACK				
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED		UNIT:mm		

SHOGYO INTERNATIONAL CORP.

SCP643CNS321000G