
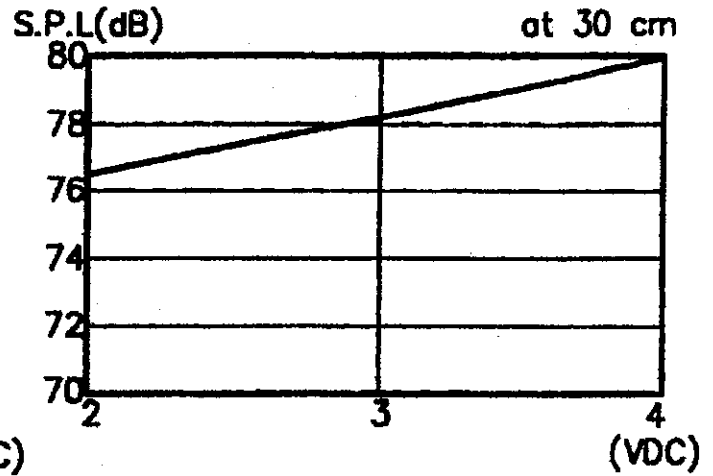


Tolerance: $\pm 0.5\text{mm}$

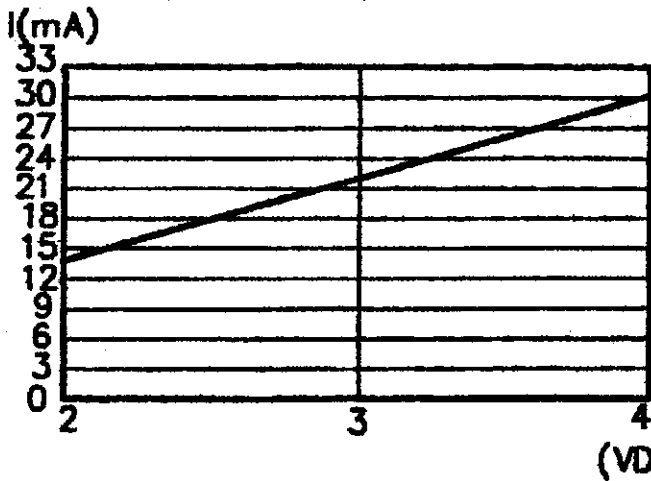

Operating Voltage (VDC)	2~4
Current Consumption (Operating Frequency at 3VDC)(mA,maximum) at 400 +/- 100 HZ)	50
Sound Pressure Level at 30cm/3VDC (dB,minimum)	75
Tone	Continuous
Operating Temperature (°C)	-20~+60
Storage Temperature (°C)	-30~+70
Weight (Gram)	9.7

TITLE ELECTRONIC SOLID STATE AUDIO INDICATOR		PART NO. SEM-3603 (RoHS)
APPROVALS	SCALE: 1.5:1	DWG NO.
DRAWN: FENG 2006-05-28	UNIT: mm	MATERIAL ABS UL-94 1/16" HB
CHECKED: [Signature]	EDITION: 2	
APPROVED: [Signature]	SHEET 1 OF 1	

SHOGYO

SHOGYO INTERNATIONAL CORP.
6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
TEL: (516) 921-9111 • FAX: (516) 921-3777
www.shogyo.com